

# UPSKY™ preterminated cable singlemode & multimode

- Single-mode and multimode fibres in the same cable
- 24/48/72 fibres
- High mechanical resistance
- Supplied with UPSKY™ BOX L/XL connector block

## Design


- Small diameter cable
- Dielectric and non-polarized
- UV-resistant
- Waterproof

## Installation

- Indoor and outdoor
- LSZH-FR

## Environmentally friendly

- Eco-designed
- PEP Eco Passport
- Available upon request

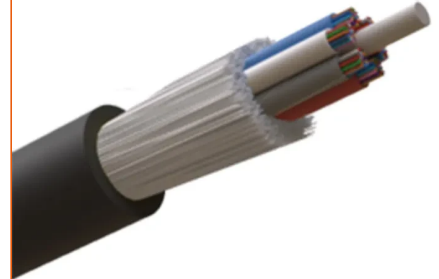

# UPSKY™

# UPSKY™ preterminated cable singlemode & multimode

## CHARACTERISTICS

### 结构特性

颜色	黑
外护套	低烟无卤阻燃
结构类型	Multitube with strenght member
Fibre optic type	SM G657 A2 or OM3
额外加强件	玻璃纱

### 尺寸特性

近似重量	85 kg/km
Cable Diameter	8.9 mm

### 机械特性

机械耐冲击性能	5N.m
耐压	100daN/cm kg/cm
最大牵引力	200daN (80 daN) kN

### 使用特性

最小弯曲半径 - 静态	178 mm
存储温度范围	-40...70 °C
安装类型	室内/户外
Installation temperature, range	0...40 °C
Operating temperature flexing, range	-40...70 °C

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.

## Product list

Aginode ref.	Country ref.	Name	额外加强件	颜色	Fibre optic type	光纤数
13200648	-	UPSKY™ preterminated cable 72 LC (48MM + 24SM) / 80m	玻璃纱	黑	SM G657 A2 or OM3	72
13200649	-	UPSKY™ preterminated cable 72 LC (48MM + 24SM) / 50m	玻璃纱	黑	SM G657 A2 or OM3	72
13200650	-	UPSKY™ preterminated cable 24 LC (16MM + 8SM) / 100m	玻璃纱	黑	SM G657 A2 or OM3	24

☎ = Make to order, 📦 = In Stock

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.