
LANmark 工业 DIN 导轨插座和插座盒

LANMARK INDUSTRY MODULE DIN-RAIL MOUNT WITH 1 SNAP-IN CATEGORY 6 GREY - DISCONTINUED

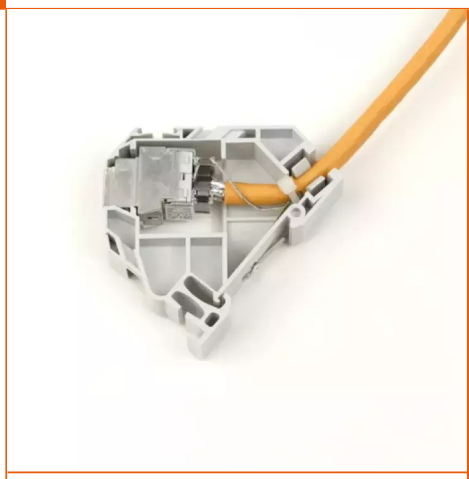

Aginode Ref: N20i.000

- For DIN-Rail mount (35mm)
- Data connection for the industry
- Easy termination, without punch down tool.
- Includes Mount + LANmark-6 shielded connector
- For technical enclosures, Wireless Access Points, Industrial cabinets

Application

The LANmark Industry DIN-Rail mount is designed to enable the installation of LANmark-6 Snap-in data connectors in industrial cabinets fitted with a 35mm DIN-Rail. Several DIN-Rail mounts can be joined together to form a row. The LANmark-6 connector exceeds the requirements of the ISO/IEC 11801:2002. As such it supports all data applications defined for Cat 5, Cat 5e and Cat 6, such as:

- 10baseT
- Fast Ethernet
- Gigabit Ethernet
- 155 ATM
- 622 ATM
- 1.2 ATM
- Industrial Ethernet

Performance

The LANmark-6 Snap-in connector has been designed to reach the highest performance in Category 6. It has been tested as specified in the TIA/EIA-568-B.2-1, the IEC 60603-7-5 (screened) standards. Furthermore, it complies with the Terms and conditions for use of the EC Verified marking on generic cabling products, as certified by Delta independent testing.

Installation

The LANmark-6 Snap-in connector is designed to be terminated without punchdown tool. For fast and easy installation an optional comfort tool can be used.

- Fast termination
- Colour code : TSB568A & TSB568B

STANDARDS

IEC 60603-7-5
ISO/IEC 11801
ISO/IEC 24702

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.

- Can be used with all types of cables : UTP, F/UTP, SF/UTP and S/FTP
- Accepts 24, 23 and 22 AWG cable, PUR, LSZH
- For all LANmark industrial cables

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.

LANmark Industry module DIN-rail mount with 1 Snap-In Category 6 grey - DISCONTINUED

Characteristics

结构特性	
电缆引入线	从顶部
颜色	灰
连接器类型	RJ 45
材料	ABS
屏蔽	是
尺寸特性	
单位近似重量	0.03 kg
深度	65 mm
螺杆尺寸	N/A
高度	77.8 mm
Length cable end on inner side	80.0 mm
电缆数	1
壁厚	1.6 mm
宽度	18 mm
电气特性	
特性阻抗	100 Ohm
最大工作频率	250 MHz
机械特性	
机械耐冲击性能	低
使用特性	
类型	Cat. 6
部件功能	布线和连接解决方案
抗电磁干扰	Yes
应用类型	工业安装
最高工作温度	70 °C

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.

端口数	1
包装	塑料带
RoHS compliant	Yes
防水	无

文件

Freetable LM6 conn.xls xls — 13.5 KB 下载

销售和交付信息

The LANmark-6 DIN-Rail Mount is fitted with a earth tag for termination of the cable drain wire / shield - to provide a grounding connection to the DIN-Rail. Please see installation guide. A set of covers for both sides of the module is also available (N20i.002).

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.