Essential5 超五类铜缆Keystone信息模块

ESSENTIAL-5 KEYSTONE 超五类非屏蔽KEYSTONE模块



Aginode Ref: N420.415

- 可选Keystone型模块
- 颜色编码：T568A和T568B
- 可接受24，23AWG的电缆
- UL认证
- 支持重复端接

应用

essential-5系列模块符合ISO/IEC 11801以及TIA/EIA 568-C.2中对Class D/Cat5e的规定。带宽支持到100MHz。模块类型支持UTP和FTP。SNAP-IN模块化的设计，适合于所有耐克森模块化结
构硬件，使安装更快速和方便。

- 10baseT Ethernet
- 100baseTX Fast Ethernet
- 1000base-T Gigabit Ethernet
- 155 Mbit ATM
- 622 Mbit ATM

特点

- 可选Keystone型模块
- 颜色编码：T568A和T568B
- 可接受24，23AWG的电缆
- UL认证
- 支持重复端接

参考标准

- ISO/IEC 11801
- TIA/EIA 568-C.2

STANDARDS

ISO/IEC 11801

Dimensions Essential-5 Keystone connector

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.

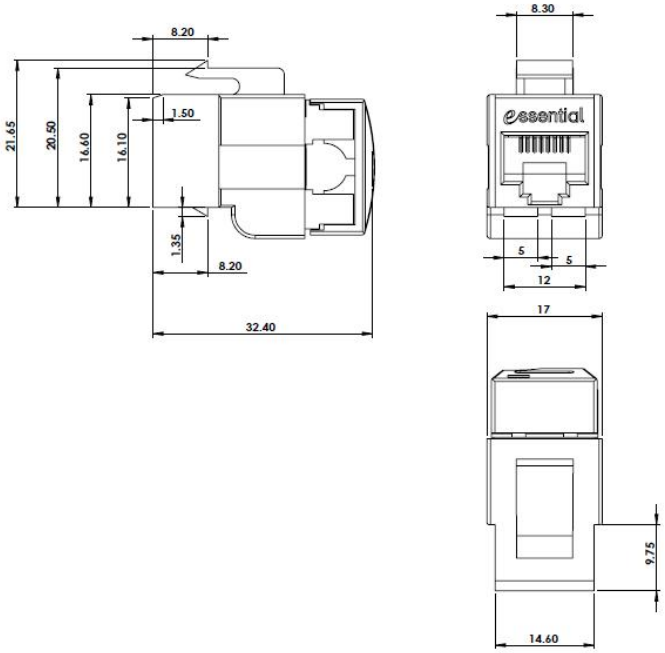

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.

Essential-5 Keystone 超五类非屏蔽Keystone模块

Characteristics

结构特性	
颜色	白
屏蔽	非屏蔽
连接器类型	RJ45 和 110/LSA+ IDC
尺寸特性	
深度	32.4 mm
高度	21.6 mm
宽度	17 mm
使用特性	
范围	essential
操作温度，范围	-20...60 °C
类型	Cat. 5e
部件功能	连接器
存储温度范围	-20...60 °C
环境安装温度，范围	-10...60 °C

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.