
LANmark 工业 DIN 导轨插座和插座盒

LANMARK INDUSTRY MODULE DIN-RAIL MOUNT WITH 1 SNAP-IN CATEGORY 6A GREY

Aginode Ref: N20i.004

- For DIN-Rail mount (35mm)
- Data connection for the industry
- Easy termination, without punch down tool.
- Includes Mount + LANmark-6A shielded connector
- For technical enclosures, Wireless Access Points, Industrial cabinets

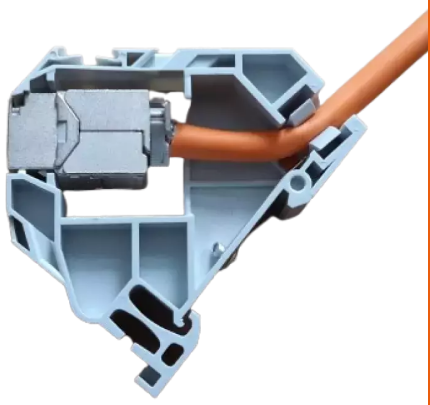

STANDARDS

ISO/IEC 11801
ISO/IEC 24702

Application

The LANmark Industry DIN-Rail mount is designed to enable the installation of LANmark-6A Snap-in data connectors in industrial cabinets fitted with a 35mm DIN-Rail. Several DIN-Rail mounts can be joined together to form a row. The LANmark-6A connector exceeds the requirements of the ISO/IEC 11801. As such it supports all data applications defined for Cat 5, Cat 5e, Cat.6 and Cat 6A, such as:

- 10baseT
- Fast Ethernet
- Gigabit Ethernet
- 10 Gigabit Ethernet
- 155 ATM
- 622 ATM
- 1.2 ATM
- Industrial Ethernet

Performance

The LANmark-6A Snap-in connector has been designed to reach the highest performance in Category 6A. It has been tested as specified in the TIA/EIA-568-B.2-1, the IEC 60603-7-5 (screened) standards. Furthermore, it complies with the Terms and conditions for use of the EC Verified marking on generic cabling products, as certified by Delta independent testing.

Installation

The LANmark-6A Snap-in connector is designed to be terminated without punchdown tool. For fast and easy installation an optional comfort tool can be used.

- Fast termination

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.

- Colour code : TSB568A & TSB568B
- Can be used with all types of cables : UTP, F/UTP, SF/UTP and S/FTP
- Accepts 24, 23 and 22 AWG cable, PUR, LSZH
- For all LANmark industrial cables

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.

LANmark Industry module DIN-rail mount with 1 Snap-In Category 6A grey

Characteristics

结构特性	
电缆引入线	从顶部
颜色	灰
连接器类型	RJ 45
材料	ABS
屏蔽	是
尺寸特性	
单位近似重量	0.03 kg
深度	65 mm
螺杆尺寸	N/A
高度	77.8 mm
Length cable end on inner side	80.0 mm
电缆数	1
壁厚	1.6 mm
宽度	18 mm
电气特性	
特性阻抗	100 Ohm
最大工作频率	500 MHz
使用特性	
类型	Cat. 6A
最高工作温度	70 °C
端口数	1
包装	Set of 12 modules individually bagged (in cardboard box)

Installation instructions DIN-rail mount module with LANmark-6A ULTIM connector

PROM N20i.004.pdf pdf — 9.48 MB 下载

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.

销售和交付信息

The LANmark-6A DIN-Rail Mount is fitted with a earth tag for termination of the cable drain wire / shield - to provide a grounding connection to the DIN-Rail. Please see installation guide. A set of covers for both sides of the module is also available (N20i.002).

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.