
SNAP-IN模块化配线架

24 口SNAP-IN固定式配线架绑扎型理线 -黑色

Aginode Ref: N521.664BK

- 与所有 LANmark SNAP-IN连接器兼容
- 24 个带防尘盖的卡入式端口
- 夹持机制
- 独有的自动连接接地系统
- 通用设计，支持非屏蔽和屏蔽连接器
- 用于电缆应力消除的绑带功能

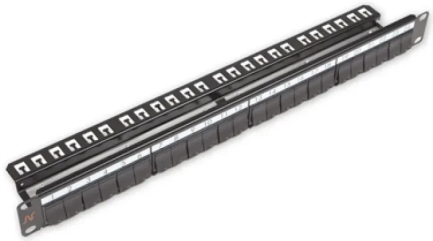

Aginode Snap-In 系列配线架设计用于容纳 LANmark 产品系列（LANmark-7A、LANmark-7、LANmark-6A、LANmark-6 和 LANmark-5）中的任何 Snap-In 连接器。

SNAP-IN配线架具有独特的夹入式系统，可将连接器固定在面板中，并提供简单的屏蔽连接器接地方法，以方便安装。面板与大地的连接通过独特的自动连接功能实现，无需单独的接地导体。

该面板还有一系列配套的电缆管理产品，如空白面板和跳线导轨。

跳线板专为标准 19" 机柜设计，高度为 1U，支持以下常见功能：

- 24 个端口，带防尘盖
- 专为屏蔽和非屏蔽卡入式连接器设计
- 兼容所有性能类别的连接器
- 用于简单接地的卡扣式装置
- 独有的后部电缆管理设施
- 坚固的结构
- 用于端口标签的印刷编号

该面板有 "T "型槽，便于使用电缆扎带释放电缆应力，保护连接器终端免受拉力。

每个面板附带一袋 25 条黑色尼龙扎线带。

STANDARDS

ISO/IEC 11801

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.

24 口SNAP-IN固定式配线架绑扎型理线 -黑色

Characteristics

结构特性	
颜色	黑
材料	钢
尺寸特性	
深度	75 mm
宽度	19 inches
高度单位	1 U
使用特性	
应用类型	固定安装
端口数	24
机械耐受度	良好的机械防护
包装	箱
抗振	高

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.