
TDCOP - Optical modular cable head

TDCOP - PRECONNECTORISED MODULAR PLATE

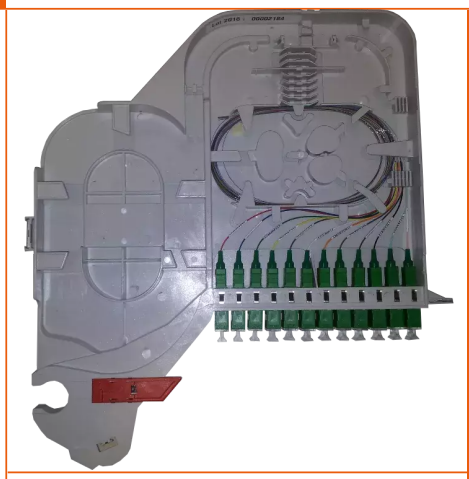

Aginode Ref: 10261067

Plastic optical modular plate for TDCOP

- 1 plate with 12 adaptors each
- Light weight
- On-site installation for completion of existing TDCOP
- Préconnectorised with 12 pigtails and 12 SC adaptors
- Tubes storage
- Working position locking system

Optical Modular Cable Head TDCO is designed for high density nodes of FTTx networks where an important flexibility to route the optical signal is requested.

This thermoplastic version gives a significant reduction of weight, over 50% compared with metal version (less than 5 kg with a plastic version equipped with 144 fibers), improves flexibility with individual management of 12 fibers plates, maintains excellent sturdiness, and proposes many innovations as a locking in the working position.

Main functions are:

- To protect up to 144 optical splices and fibers against environment and handling,
- To coil and identify effectively and easily the optical fibers,
- To coil in each plate up to 2 meters of tube,
- To distribute by patching or crossing up to 12 fibers per plate,
- To receive if necessary 1x4, 1x8 or 2x2 splitters.

TDCOP consists in a frame equipped with maximum 12 plates with covers. Each plate has a 12-fibre modularity. Accessories for fibers management (combs, clamps, sealings…) are provided.

Three common configurations are possible:

Splicing-Patching: Each plate includes without accessory 12 splices on pigtails and 12 SC adapters. Splicing can be made

STANDARDS

Aginode specification
Orange/France Telecom

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.

plate opened or down of the cable head. Plate can also be used to connect a pre-connectorised cable or breakout (fan-out Ømax 13mm) directly on adaptors.

Splicing-Splitting-Patching: Each plate can include splitters whose trunks are spliced in a dedicated cassette mounted on swivel hinge.

Splicing-Crossing: in order to save a connection point if the optical budget is limited, this is possible to replace adapters with a grommet. Thus combs integrated into the plates allow the stripping of Ø 2mm instead of 900µm before splicing.

Each plate has a two coiling areas: a first one for coiling up to 2 meters of tube and to allow moving the plate closer to the fusion splicer and a second one protected by a transparent cover to store fibers and splices. Each plate has a dedicated area to splice up to 12 pigtails or crossing fibres. An additional splicing cassette can be installed for splitting purposes.

Fixation is performed with a metal fixed chassis on an optical open frame. The metal chassis also provides rotation axis of the plates, guiding ways for Ø5mm tubes or cables from the rear, guiding ways for Ø2mm patchcords from the front to the left hand side.

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.

TDCOP - Preconnectorised modular plate

Characteristics

结构特性	
颜色	浅灰 RAL 7035
无卤	是
材料	Thermoplastic
尺寸特性	
深度	260 mm
高度	250 mm
宽度	272 mm
Cable Diameter	5 mm
使用特性	
操作温度，范围	-25...70 °C
适配器	SC/APC
最小弯曲半径 - 静态	30 mm
包装	箱
RoHS compliant	Yes

文件

Optical modular cable head - Installation manual - version C pdf — 8.81 MB 下载

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.