

风管 - 松套管电缆

LOOSE TUBE CABLE 6X12SM SP1449

Aginode Ref: SP1449

This cable is used for Access, Distribution, City Network and FTTx applications. It is designed to be installed by pulling or blowing in ducts.

Characteristics & Applications


- High blowing distance due to the excellent friction properties of the outer sheath
- Central strength member reinforcement
- All dielectric design
- Waterproof dry core structure

Fibre Type

The cable is available with different fibre types.

Construction

- Jelly filled tubes containing coloured fibres
- Central FRP strength member
- Low friction outer sheath

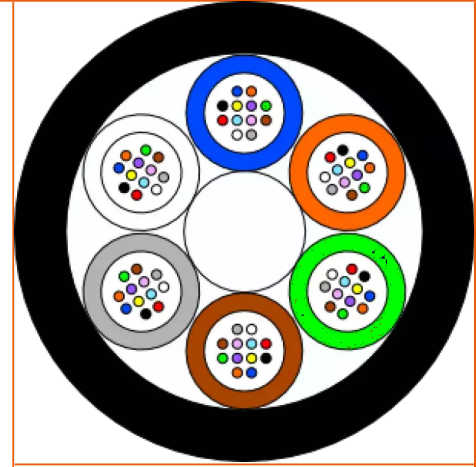

STANDARDS

EN 187000
IEC 60794

Loose Tube Cable 6x12SM SP1449

Characteristics

结构特性

铠装类型	芳纶
外护套	HDPE
光纤类型	SM
结构类型	松套管
不含金属	Yes
加强构件	FRP

尺寸特性

管数	6
光纤数	72
标称外径	9.0 mm
近似重量	67 kg/km

机械特性

耐挤压 (IEC 794-1-E3)	400 N/cm
允许牵引负载	270 daN

使用特性

安装类型	户外 - 管道
操作温度, 范围	-30...70 °C
敷设时弯曲系数	20 (xD)
存储温度范围	-40...70 °C
环境安装温度, 范围	0...40 °C