
风管 - 松套管电缆

LOOSE TUBE CABLE 6X12SM SP1449

Aginode Ref: SP1449

This cable is used for Access, Distribution, City Network and FTTx applications.It is designed to be installed by pulling or blowing in ducts.

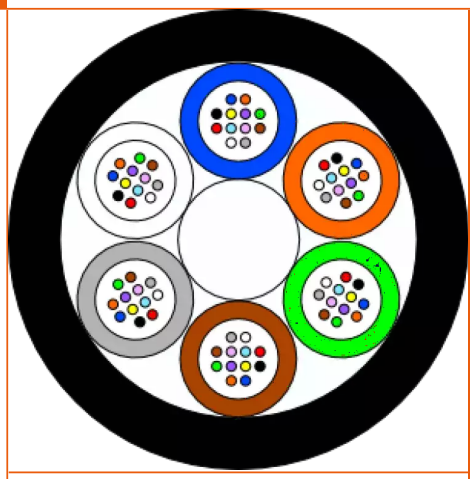

STANDARDS

EN 187000
IEC 60794

Characteristics & Applications

- High blowing distance due to the excellent friction properties of the outer sheath
- Central strength member reinforcement
- All dielectric design
- Waterproof dry core structure

Fibre Type

The cable is available with diffrent fibre types.

Construction

- Jelly filled tubes containing coloured fibres
- Central FRP strength member
- Low friction outer sheath

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.

Loose Tube Cable 6x12SM SP1449

Characteristics

结构特性	
铠装类型	芳纶
外护套	HDPE
光纤类型	SM
结构类型	松套管
不含金属	Yes
加强构件	FRP
尺寸特性	
管数	6
光纤数	72
标称外径	9.0 mm
近似重量	67 kg/km
机械特性	
耐挤压 (IEC 794-1-E3)	400 N/cm
允许牵引负载	270 daN
使用特性	
安装类型	户外 - 管道
操作温度，范围	-30...70 °C
敷设时弯曲系数	20 (xD)
存储温度范围	-40...70 °C
环境安装温度，范围	0...40 °C

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.