
风管 - 松套管电缆

LOOSE TUBE ARMORED CABLE 8X12SM SP1504

Aginode Ref: Loose Tube Armored Cable 8x12SM SP1504

This cable is used for Access, Distribution, City Network and FTTx applications.It is designed to be installed by pulling or blowing in ducts.

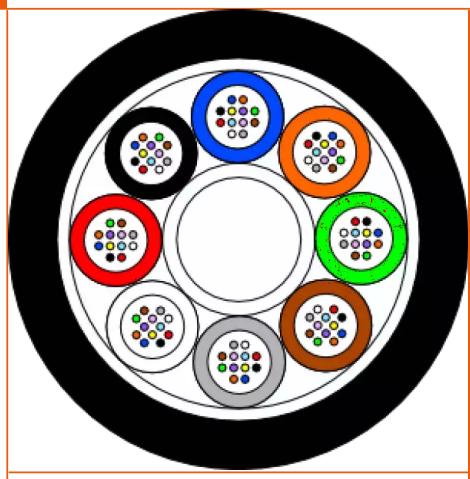

STANDARDS

EN 187000
IEC 60794

Characteristics & Applications

- High blowing distance due to the excellent friction properties of the outer sheath
- Central strength member reinforcement
- High pulling strength
- All dielectric design
- Waterproof dry core structure

Fibre Type

The cable is available with diffrent fibre types.

Construction

- Jelly filled tubes containing coloured fibres
- Central FRP strength member
- Glass yarns armoring
- Very Low friction outer sheath

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.

Loose Tube Armored Cable 8x12SM SP1504

Characteristics

结构特性	
铠装类型	玻璃纤维丝
外护套	HDPE
加强构件	FRP
不含金属	Yes
结构类型	松套管
光纤类型	SM
尺寸特性	
标称外径	11.4 mm
近似重量	114 kg/km
光纤数	96
管数	8
机械特性	
允许牵引负载	800 daN
耐挤压 (IEC 794-1-E3)	300 N/cm
使用特性	
敷设时弯曲系数	20 (xD)
操作温度，范围	-30...70 °C
环境安装温度，范围	0...40 °C
存储温度范围	-40...70 °C
安装类型	户外 - 管道

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.