

# Duct - Unitube cables

UNITUBE CABLE 1X12SM SP1647

**Aginode Ref:** 10231297

This unitube cable is used in the Access, Distribution, City Network and FTTx applications; it is designed to be easily installed in outdoor installations.

## Characteristics & Applications



- Easy installation due to the friction properties of the outer sheath
- Robust design
- Waterproof structure
- Halogen free

## Fibre type

The cable is available with different fibre types.

## Construction

- Jelly filled tube
- Reinforcement elements
- Low friction outer sheath

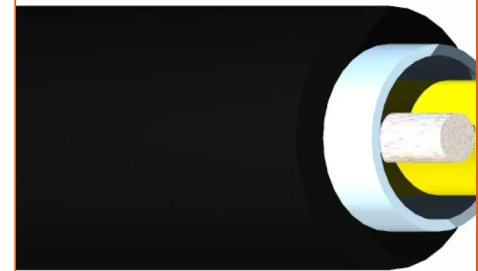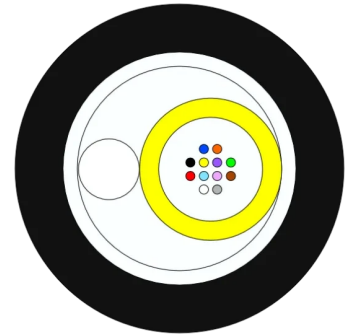

## STANDARDS

IEC 60794

# Unitube Cable 1x12SM SP1647

## Characteristics

### 结构特性

颜色	黑
光纤类型	SM (G.652D)
铠装类型	玻璃纤维丝
外护套	HDPE
结构类型	Unitube
绝缘	是

### 尺寸特性

管数	1
近似重量	40 kg/km
光纤数	12
标称外径	6.9 mm

### 机械特性

允许牵引负载	180 daN
--------	---------

### 使用特性

操作温度, 范围	-30...70 °C
存储温度范围	-40...70 °C
安装类型	户外 - 管道
Installation temperature, range	0...40 °C
敷设时弯曲系数	20 (xD)