

ADSS - Loose tube cables

AERIAL LOOSE TUBE CABLE 10X12SM SP1912

This cable is used for Access, Distribution, City Network and FTTx applications. It is designed to be installed on poles and can be also installed in duct..



Characteristics & Applications

- Aramid yarns armouring
- Central strength member reinforcement
- All dielectric design
- Waterproof dry core structure
- Small size ADSS design to minimize the effect of ice and wind

Construction

- Jelly filled tubes containing coloured fibres
- Central FRP strength member
- Aramid yarns armouring
- HDPE outer sheath

Installation Table for Aerial

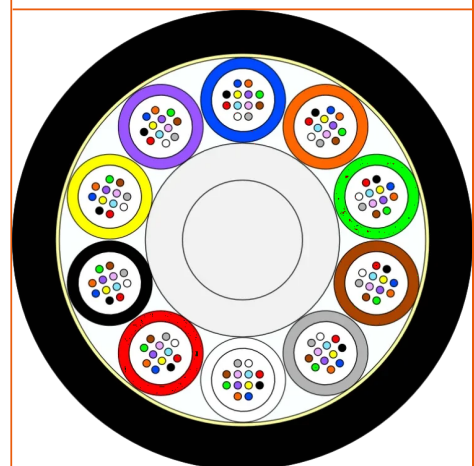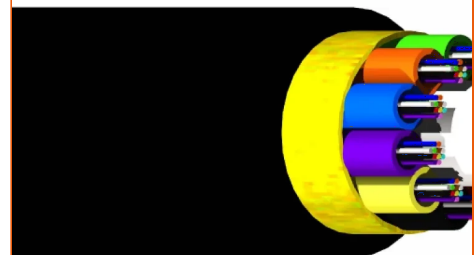

STANDARDS

EN 187000
IEC 60794

Installation properties: SP1912 with 12 fibres per tube

The cable parameters are calculated according to the weather (summer and winter) defined below.
In different environmental conditions, please contact us to define the behavior of the cable

Installation coefficient 0.9%		Summer	Winter
Weather conditions	Wind speed	105 km/h	0 km/h
	Dynamic pressure	520 N/m ²	0 N/m ²
	Ice load	0.00 kg/m	0.62 kg/m
	Ice type	-	Ice
	Ice thickness	0.0 mm	11.9 mm
	Operating temperature	15 °C	-5 °C
Installation temperature		15 °C	15 °C

Cable behaviour	Span distance	Installation pulling force	Installation allowable sag	Maximum allowable sag	Max Operating force
	50 m	750N	0.45m	2.92	1800N
	70 m	1050N	0.63m	3.85	2290N
	90 m	1350N	0.81m	4.72	2750N
	110m	1650N	0.99m	5.55	3189N
	130m	1950N	1.17m	6.36	3613N

* Ratio between the sag and the distance between two poles

Aerial Loose Tube Cable 10x12SM SP1912

Characteristics

结构特性

光纤类型	SM
铠装类型	芳纶
外护套	Anti-tracking
不含金属	Yes
加强构件	FRP
结构类型	松套管

尺寸特性

管数	10
近似重量	108 kg/km
光纤数	120
标称外径	11.8 mm

机械特性

操作时最大拉力负载	370.0 daN
允许牵引负载	500 daN
耐挤压 (IEC 794-1-E3)	300 N/cm

使用特性

操作温度, 范围	-30...70 °C
存储温度范围	-40...70 °C
安装类型	架空 - 自承式
环境安装温度, 范围	0...40 °C
敷设时弯曲系数	20 (xD)

文件

Deadends - Helical - ASFOTC 110-120 pdf — 791.15 KB 下载 ↴

Suspensions - PSR 820 pdf — 879.11 KB 下载 ↴

销售和交付信息

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.

Standard Marking

Aginode - MK - SPxxxx - FIBRE OPTIC CABLE - XX*YY - TN - metric

XX = Fibre Count

YY = Fibre Type TN = Traceability Number

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.