LANmark-OF 室内紧缓冲层光缆TB 2-24芯 低烟无卤（亚太）

LANMARK-OF 紧缓冲层光缆TB LSZH SM G.652.D 4芯 黄色

Aginode Ref: N174.021

紧缓冲层光缆

- 为主干/水平安装而设计的室内光缆
- 所有光纤等级
- 低烟无卤 (LSZH)

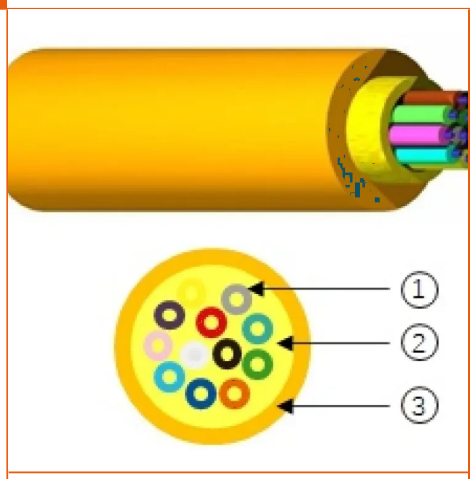

说明和应用

Aginode LANmark-OF TB 室内光缆专为室内应用而设计。该光缆采用 900 微米紧密缓冲光纤，传输介质周围有阻燃护套，900 微米护套为光纤提供额外保护。光缆外层覆有芳纶纱作为强度部件，最外层覆有 LSZH 护套。可提供对弯曲不敏感的 OM3/OM4 和单模 G.652.D 和 G.657.A1。

光缆为干式结构，适合水平或垂直安装。光缆
符合室内防火要求，可安装在管道中。
- 可垂直或水平安装
- 适用于标准多模和单模光纤
- LSZH 护套
- 紧密缓冲光纤，便于剥线

STANDARDS

ANSI/TIA-568-C.3
IEC 60332-1
IEC 60332-3-24 Cat.C
IEC 60793-2-10
ISO/IEC 11801

结构

2-24 芯光缆横截面图附带图例：

1. 900 微米紧密缓冲纤维
2. 芳纶纱
3. LSZH 护套材料

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.

LANmark-OF 紧缓冲层光缆TB LSZH SM G.652.D 4芯 黄色

Characteristics

结构特性	
颜色	黄
光纤类型	SM (G.652D)
尺寸特性	
外径	5.2 mm
光纤数	4
机械特性	
抗冲击性能(IEC 60794-1-E4)	100次冲击/ N.M
耐压(IEC 60794-1-E3)	1000 N/100mm
最大拉力(IEC 60794-1-2-E1)	800 N
使用特性	
操作温度，范围	-20...60 °C
最小弯曲半径 - 动态	104.0 mm
最小弯曲半径 - 静态	52 mm
存储温度范围	-30...70 °C
Installation temperature, range	0...40 °C

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.