
B-LITE LT - 微型软管电缆

MICROCABLE 6X12SM SP2003

Aginode Ref: 10571488

This compact cable is used for Access, Distribution, City Network and FTTx applications.It is designed to be quickly installed by blowing in micro-ducts.

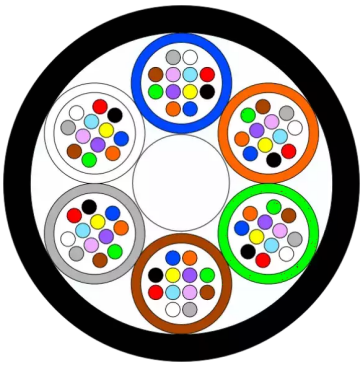

Characteristics & Applications

- High blowing distance due to the excellent friction properties of the outer sheath
- Right balance between flexibility and rigidity
- Easy installation with mid span access possibility
- Central strength member reinforcement
- All dielectric design
- Waterproof structure

STANDARDS

EN 187000
IEC 60794

Construction

- Jelly filled microloose tubes containing coloured fibres
- Central FRP strength member
- Very Low friction outer sheath

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.

Microcable 6x12SM SP2003

Characteristics

结构特性	
结构类型	多束管
光纤类型	SM
不含金属	Yes
外护套	HDPE
加强构件	FRP
尺寸特性	
近似重量	23 kg/km
标称外径	5.3 mm
光纤数	72
管数	6
机械特性	
耐挤压 (IEC 794-1-E3)	100 N/cm
允许牵引负载	50 daN
操作时最大拉力负载	20.0 daN
使用特性	
环境安装温度，范围	0...40 °C
敷设时弯曲系数	20 (xD)
安装类型	户外 - 可吹缆的微管
操作温度，范围	-30...60 °C
存储温度范围	-40...70 °C

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.