

IN AND OUT IP Cable

AGINODE CAT6A U/FTP 4P IN/OUT ECA 500M

Aginode Ref: 13200561

EAN: 3760400091851

Benefits

- Excellent performance : Cable compliant with IEC 61156-5 CAT6A (channel 100m)
- System : compliant with EA class according to ISO/IEC 11801 & EN 50173 performances
- Time saving solution: universal installation in&out thanks to his specific LSZH jacket
- Security : flame retardant IEC 60332-1 and Eca level according to EN50575:2014+A1:2016 and IEC 60332-1
- Ccompatible with RJ45 CAT6A connector thanks to his awg23 gauge
- Immunity : PIMF construction for better EMC performance
- Compatible POE, POE+ and POE++
- Environmental : RoHS EC Directive and European Reach compliant

Application


- suitable to connect all IP equipment : indoor and outdoor
- perfect cable for link configuration such as MPTL
- the special jacket guarantee a very good UV and humidity resistance and also a LSZH compliance

The AWG23 wire diameter authorize direct connection with RJ45 connector and field plug to make the installation quicker and easier.

Manufactured in accordance with IEC 61156-5 transmission requirements, the U/FTP cable is the best choice to support 10Gigabit Ethernet in channel configurations and MPTL link. Thanks to his special jacket this is the perfect solution for smart city and smart building applications such as video security applications, outdoor and indoor wifi access point, IP dynamic screen, urban automation systems etc.

Construction

- conductor : solid bare copper
- insulation : polyethylen (EN 50290-2-23) - two insulated conductors twisted to a pair
- screen : Alu/PET on each pair, alu outside - 4/2 laid up together

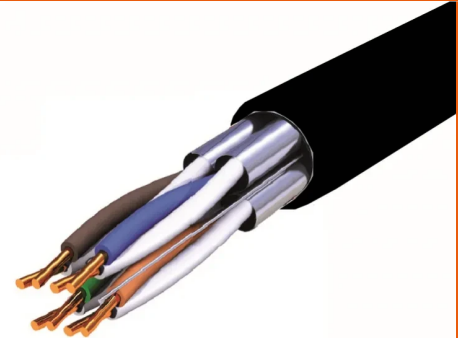

STANDARDS

EN 50173
EN 50288
EN 50575
IEC 61156-6
ISO/IEC 11801

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.

- outer jacket : In&Out Eca (EN50575)

Environment

Designed to reduce the environment impact, Aginode cables are compliant with RoHS 2011/65 Directive and European Reach 1907/2006/EC regulation. The outer sheath of the cable is made of halogen free material (IEC 60754-1 / EN 50267-2-1), with limited smoke emissions (IEC 61034-1/2 / EN 50268-1/2) and no acide gaz emissions in case of fire (IEC 60754-2 / EN 50267-2-2).

Aginode measure the environmental impact of each cable. Upon request, PEP Ecopassport or the Eco Material Declaration could be available

Related product

Part Number	Description	Packaging
N420.66A	LANmark-6A Evo Snap-in Connector Category 6A Screened	24 in individual polybag
N420.66A-ECO24	LANmark-6A Evo Snap-in Connector Category 6A Screened ECO	24 in 0 plastic "eco-friendly" packing
N420.66A-BULK100	LANmark-6A Evo snap-in connector Category 6A screened BULK	Bulk 100 in polybag
N10G.CONSS	LANmark-10G Snap-in connector Category 6A Screened	24 in individual polybag
N490.001	LANmark-6A Field Terminable Plug Category 6A Screened	24 in individual polybag

AGINODE CAT6A U/FTP 4P In/Out Eca 500m

Characteristics

结构特性

外护套	In & out
护套颜色	黑
无卤	是
Higher heating value	493 MJ/km
电缆类型	U/FTP
屏蔽	80% tinned copper braid coverage
线对屏蔽	Aluminium / Polyester tape
总屏蔽	Tinned copper braid

尺寸特性

近似重量	49 kg/km
线对数	4
导体横截面尺寸 (AWG)	23
绝缘外径	1.32 mm
标称外径	7.0 mm
外部尺寸	Not applicable

电气特性

20°C时导体的最大直流电阻	75 Ohm/km
特性阻抗在100Mhz	100 Ohm

机械特性

最大安装拉力	80 N
--------	------

传输特性

传播速度	0.82 %
耦合衰减在30MHz	>70 dB
最大延时典型值	450 ns/100m
导体最大延时典型值	536 ns/100m
线对最大延时典型值	540 ns/100m

使用特性

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.

应用类型	室内、户外
耐气候性	优异
阻燃 - 火焰	IEC 60332-1
烟密度	低
包装	Drum 500 m
环境安装温度, 范围	-25...50 °C
敷设时弯曲系数	8 (xD)
安装时弯曲系数	4 (xD)
环境静态工作温度, 范围	-40...75 °C

业绩声明

AGINODE CAT6A U/FTP 4P In/Out Eca 500m pdf — 115.57 KB [下载](#) ↓