

风管 - 松套管电缆

LOOSE TUBE LSZH CABLE 6X12SM SP1499

Aginode Ref: A/I-DQ(ZN)B2Y


This cable is used for Access, Distribution, City Network and FTTx applications. It is designed to be installed by pulling for indoor and outdoor use.

Characteristics & Applications

- Central strength member reinforcement
- High pulling strength
- All dielectric design
- Waterproof dry core structure
- Zero Halogen
- Non corrosive smoke emission
- Flame non propagation IEC 60332-1

Construction

- Jelly filled tubes containing coloured fibres
- Central FRP strength member
- Glass yarns armoring
- LSZH outer sheath

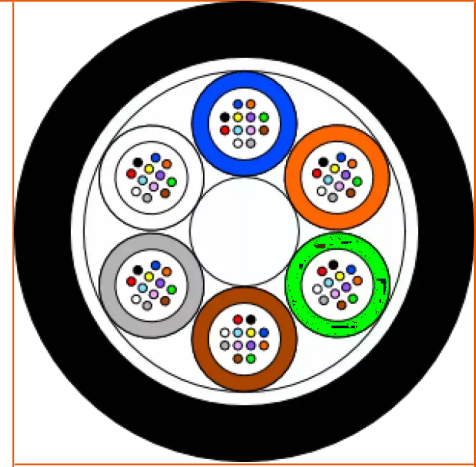

STANDARDS

EN 187000
IEC 60794
IEC 60332-1
IEC 60754-1
IEC 61034

Loose Tube LSZH Cable 6x12SM SP1499

Characteristics

结构特性

铠装类型	玻璃纤维丝
外护套	LSZH compound
光纤类型	SM (G.652D)
结构类型	松套管
不含金属	Yes
加强构件	FRP

尺寸特性

管数	6
光纤数	72
标称外径	10.0 mm
近似重量	105 kg/km

机械特性

耐挤压 (IEC 794-1-E3)	300 N/cm
允许牵引负载	400 daN

使用特性

安装类型	室内/户外
操作温度, 范围	-30...60 °C
敷设时弯曲系数	20 (xD)
存储温度范围	-40...60 °C
防啮齿保护	玻璃纱
环境安装温度, 范围	0...40 °C



销售和交付信息

Standard Marking

Aginode - MG LSZH - SP1499 - FIBRE OPTIC CABLE - XX*YY - TN - metric

XX = Fibre Count

YY = Fibre Type

TN = Traceability Number

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.