

# 风管 - 松套管电缆

## LOOSE TUBE CABLE 8X12SM SP1450

**Aginode Ref:** 10567920

SP1450 Loose Tube Cable - maximum 8 tubes with maximum 12F/tube.

This cable is used for Access, Distribution, City Network and FTTx applications. It is designed to be installed by pulling or blowing in ducts.

## Characteristics & Applications


- High blowing distance due to the excellent friction properties of the outer sheath
- Central strength member reinforcement
- All dielectric design
- Waterproof dry core structure

## Fibre Type

The cable is available with different fibre types.

## Construction

- Jelly filled tubes containing coloured fibres
- Central FRP strength member
- Low friction outer sheath

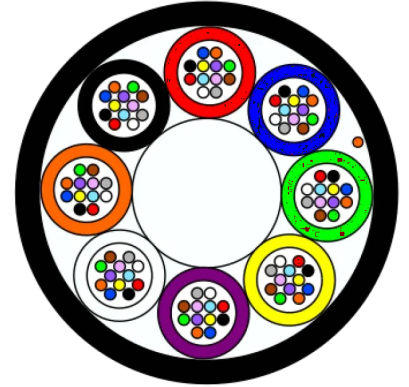

## STANDARDS

EN 187000  
IEC 60794

# Loose Tube Cable 8x12SM SP1450

## Characteristics

### 结构特性

光纤类型	SM
铠装类型	芳纶
外护套	HDPE
不含金属	Yes
加强构件	FRP
结构类型	松套管

### 尺寸特性

管数	8
近似重量	100 kg/km
光纤数	96
标称外径	10.8 mm

### 机械特性

允许牵引负载	445 daN
耐挤压 (IEC 794-1-E3)	400 N/cm

### 使用特性

操作温度, 范围	-30...70 °C
存储温度范围	-40...70 °C
安装类型	户外 - 管道
环境安装温度, 范围	0...40 °C
敷设时弯曲系数	20 (xD)