
风管 - 松套管电缆

LOOSE TUBE CABLE 8X12SM SP1450

Aginode Ref: 10567920

SP1450 Loose Tube Cable - maximum 8 tubes with maximum 12F/tube.

This cable is used for Access, Distribution, City Network and FTTx applications.It is designed to be installed by pulling or blowing in ducts.

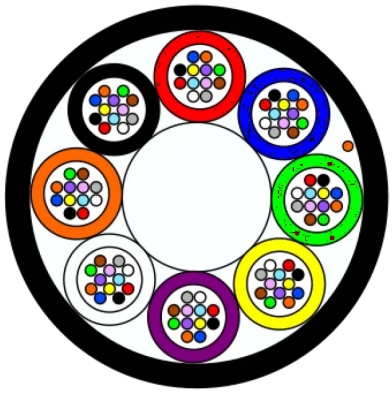

STANDARDS

EN 187000
IEC 60794

Characteristics & Applications

- High blowing distance due to the excellent friction properties of the outer sheath
- Central strength member reinforcement
- All dielectric design
- Waterproof dry core structure

Fibre Type

The cable is available with diffrent fibre types.

Construction

- Jelly filled tubes containing coloured fibres
- Central FRP strength member
- Low friction outer sheath

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.

Loose Tube Cable 8x12SM SP1450

Characteristics

结构特性	
光纤类型	SM
铠装类型	芳纶
外护套	HDPE
不含金属	Yes
加强构件	FRP
结构类型	松套管
尺寸特性	
管数	8
近似重量	100 kg/km
光纤数	96
标称外径	10.8 mm
机械特性	
允许牵引负载	445 daN
耐挤压 (IEC 794-1-E3)	400 N/cm
使用特性	
操作温度，范围	-30...70 °C
存储温度范围	-40...70 °C
安装类型	户外 - 管道
环境安装温度，范围	0...40 °C
敷设时弯曲系数	20 (xD)

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.