



# Pre-Connectorized Drop Cable (PCDC)


DUAL JACKET - ADSS, FAÇADE, PULLED IN DUCTS - 5.1 MM 1FO

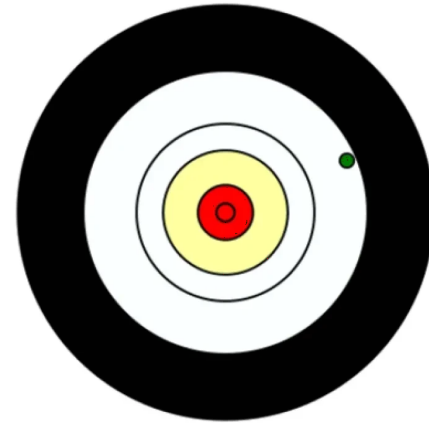

SP1892

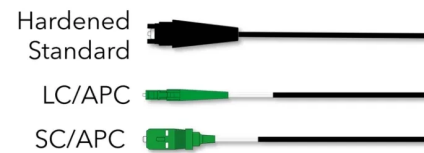

SP1892

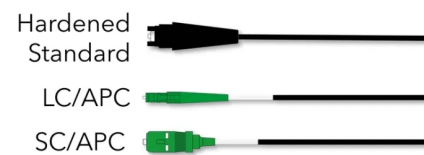

## STANDARDS

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.

**Aginode Ref:** PCDCDxxxx - SP1892

**Connectorization available:**

- Hardened Standard
- SC/APC
- LC/APC
- Hybrid jumpers are available with different connectors on each end

**Lengths (in m) and packaging available:**

- Up to 350m
- Individual recyclable paper bag
- Individual recyclable cardboard box. With spool of durable cardboard for long lengths

## Description

This cable is designed for subscriber connections in terminal part. It's suitable for façade installation.

## Characteristics & Applications

- Dual sheath cable
- All dielectric design
- UV resistant PE outersheath
- LSZH inner sheath with CPR rating : Cca s1a d1 a1
- Waterproof structure

## Construction

- Tight fibre 900µm
- LSZH inner cord SP1909 with 2.2mm diameter.
- Glass yarns reinforcements for facade applications
- PE UV resistant outersheath
- When connectorized with SC/APC or LC/APC
  - Min. length from the end of the jacket to the end of the ferrule: 90mm
  - Cable retention (cable-connector): 70N, 60s
- When connectorized with Hardened Standard
  - Cable retention (cable-connector): 300N, 60s

# Dual jacket - ADSS, Façade, Pulled in ducts - 5.1 mm 1FO

## Characteristics

### 结构特性

颜色	黑
绝缘	是
光纤类型	SM (G657.A2)
外护套	PE
电缆类型	Dual Jacket

### 尺寸特性

近似重量	26 kg/km
Cable Diameter	5.1 mm
光纤数	1
光纤数, 范围	...

### 传输特性

最大插入损耗, dB	0.25 dB
插入损耗, 典型值	0.12 dB
最小回波损耗, dB	65 dB

### 使用特性

应用类型	Customer connection
Installation temperature, range	0..40 °C
安装类型	室内/户外
最小弯曲半径 - 工作	20 (xD) 102 mm mm