

B-LITE LT - 微型软管电缆

NANOCABLE 8X24SM SM 200MM SP1895

Aginode Ref: B-Lite LT 200 8x24SM G657A1LL SP1895 COLT


This compact cable is used for Access, Distribution, City Network and FTTx applications. It is designed to be quickly installed by blowing in micro-ducts.

Characteristics & Applications

- High blowing distance due to the excellent friction properties of the outer sheath
- Right balance between flexibility and rigidity
- Easy installation with mid span access possibility
- Central strength member reinforcement
- All dielectric design
- Waterproof structure

Construction

- Jelly filled microloose tubes containing coloured fibres
- Central FRP strength member
- Very Low friction outer sheath

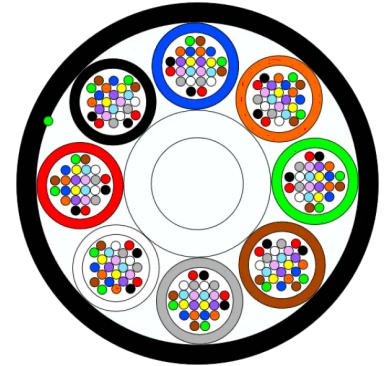

STANDARDS

EN 187000
IEC 60794

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.

Nanocable 8x24SM SM 200µm SP1895

Characteristics

结构特性

光纤类型	G657A1 - 200µm Low Loss
外护套	HDPE
不含金属	Yes
加强构件	FRP
结构类型	多束管

尺寸特性

管数	8
近似重量	39 kg/km
光纤数	192
标称外径	6.55 mm

机械特性

操作时最大拉力负载	20.0 daN
允许牵引负载	75 daN
耐挤压 (IEC 794-1-E3)	100 N/cm

传输特性

光学性能	Max atténuation @ 1310nm/1550nm : 0.34/0.19 dB/km
------	---

使用特性

操作温度, 范围	-30...60 °C
存储温度范围	-30...60 °C
安装类型	户外 - 可吹缆的微管
环境安装温度, 范围	0...40 °C
敷设时弯曲系数	20 (xD)

文件

White Paper Microblown Cable pdf — 1.94 MB [下载](#) ↓

销售和交付信息

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.

Standard Marking

Aginode - FIBRE OPTIC CABLE - SPxxxx - XX*YY - FB - TN - metric

XX = Fibre Count

YY = Fibre Type

FB = Produced in Frameries, Belgium

TN = Traceability Number

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.