

风管 - 松套管电缆

LOOSE TUBE ARMORED CABLE SP1978

Aginode Ref: A-DQ(ZN)B2Y 6x12SM


This cable is used for access, distribution, urban network and FTTx applications. It is designed to be installed by pulling or blowing into ducts.

Features and applications

- High blowing distance thanks to the excellent friction properties of the outer sheath
- Reinforced central resistance element
- Fully dielectric design
- Sealed dry core structure

Construction

- Jelly-filled tubes containing coloured fibres
- FRP central strength member
- Low-friction HDPE outer sheath (wall thickness 1.5 mm)

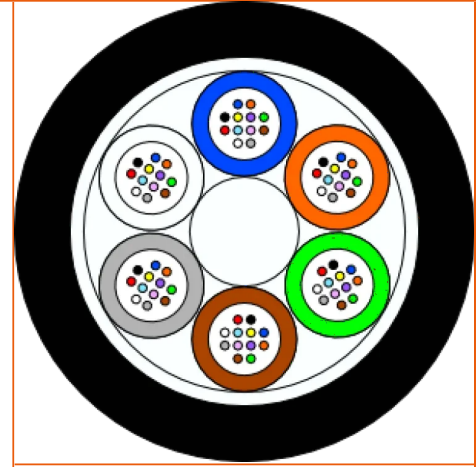

STANDARDS

EN 187000
IEC 60794

Loose Tube Armored Cable SP1978

Characteristics

结构特性

铠装类型	玻璃纤维丝
外护套	HDPE
光纤类型	SM (G.652D)
结构类型	松套管
不含金属	Yes
加强构件	FRP

尺寸特性

管数	6
光纤数	12-72
标称外径	10.6 mm
近似重量	92 kg/km

机械特性

耐挤压 (IEC 794-1-E3)	200 N/cm
允许牵引负载	400 daN

使用特性

安装类型	户外 - 管道
操作温度, 范围	-40...70 °C
敷设时弯曲系数	20 (xD)
存储温度范围	-40...70 °C
防啮齿保护	玻璃纱
环境安装温度, 范围	-5...50 °C