

# LANmark-OF Loose Tube Universal 6-12 and 24FO - Dca

LANMARK-OF LOOSE TUBE UNIVERSAL 12XSINGLEMODE 9/125 OS2 LSZH DCA YELLOW

**Aginode Ref:** N164.LTUN12-YD

- Loose Tube Universal optical fibre cable with high level transmission : OS2
- Good fire behavior : reaction to fire Dca according to EN50575:2014+A1:2016
- Indoor/Outdoor cable
- Designed for splicing with pigtails


The new 12FO OS2 Loose Tube technology from Aginode is specifically engineered for both indoor and outdoor installations where high performance, fire safety, and environmental protection are essential. Designed with a loose tube construction, it offers reliable protection for fibers against mechanical stress and environmental factors.

- **CPR (Dca-s2, d1, a1):** Low fire propagation, reduced smoke emission, minimal toxic gas release.
- **Loose Tube Construction:** Excellent fiber protection against mechanical stress and temperature variations.
- **Indoor & Outdoor Application:** Ideal for structured cabling in residential, commercial, and public buildings, as well as outdoor environments.
- **High Performance OS2 :** Reliable, high-speed data transmission over medium long distances.
- **Flexible and Robust:** Easy to install in ducts, conduits, and technical spaces.

The central tube contains till 12 fibers well identified to make installation easy and simple.

## Applications :

- Building backbone networks
- Data centers
- Outdoor installations

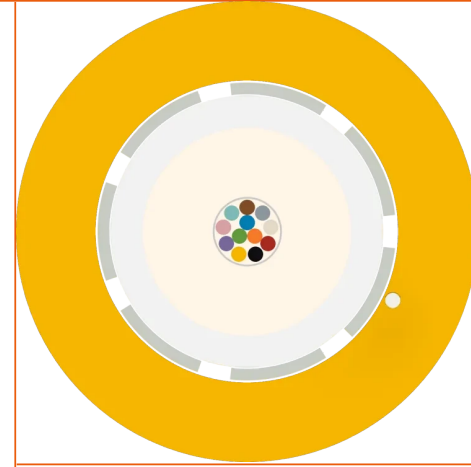

## STANDARDS

ISO/IEC 11801

# LANmark-OF Loose Tube Universal 12xSinglemode 9/125 OS2 LSZH Dca Yellow

## Characteristics

### 结构特性

|            |                       |
|------------|-----------------------|
| 结构类型       | 松套管                   |
| 光纤类型       | SM (G657.A1)          |
| 无卤         | IEC 60754-1           |
| 长度水密封性所用材料 | Swellable Glass yarns |
| 不含金属       | Yes                   |

### 尺寸特性

|       |          |
|-------|----------|
| 近似净重量 | 56 kg/km |
| 标称外径  | 6.2 mm   |
| 光纤数   | 12       |
| 管数    | 1        |
| 管径    | 2.8 mm   |

### 机械特性

|                        |              |
|------------------------|--------------|
| 耐压(IEC 60794-1-E3)     | 2000 N/100mm |
| 最大安装拉力                 | 2000 N       |
| 最大长期拉力负载               | 0.7 kN       |
| 最大拉力(IEC 60794-1-2-E1) | 2000 N       |
| 机械耐冲击性能                | 10次冲击/ 3N.M  |

### 使用特性

|                                 |               |
|---------------------------------|---------------|
| 阻燃                              | IEC 60332-3   |
| 阻燃 - 火焰                         | IEC 60332-1-2 |
| Installation temperature, range | -30..60 °C    |
| 最小弯曲半径 - 动态                     | 152 mm        |
| 最小弯曲半径 - 静态                     | 114 mm        |
| 操作温度, 范围                        | -40...70 °C   |
| 烟密度                             | IEC 61034-2   |

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.

存储温度范围

-40...70 °C

抗UV

非常好

## DoP: Declaration of Performance

DOP\_LANmark-OF Loose Tube Universal 12xSinglemode 9/125 OS2 LSZH Dca Yellow.pdf pdf — 59.25 KB [下载 ↓](#)