

风管 - 松套管电缆

UNITUBE LSZH CABLE 1X24SM SP1715

Aginode Ref: 10507089


This cable is used for Access, Distribution, City Network and FTTx applications. It is designed to be installed by pulling for indoor and outdoor use.

Characteristics & Applications

- Central strength member reinforcement
- High pulling strength
- All dielectric design
- Waterproof dry core structure
- Zero Halogen
- Non corrosive smoke emission
- Flame non propagation IEC 60332-1

Construction

- Jelly filled central tube containing coloured fibres
- Central FRP strength member
- Glass yarns armoring
- LSZH outer sheath

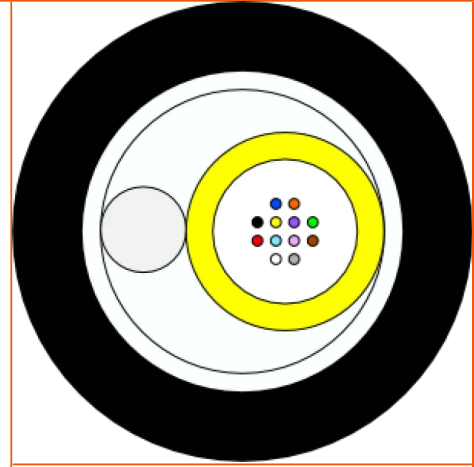

STANDARDS

EN 187000
IEC 60794
IEC 60332-1
IEC 60754-1
IEC 61034

Unitube LSZH Cable 1x24SM SP1715

Characteristics

结构特性

铠装类型	玻璃纤维丝
外护套	LSZH compound
光纤类型	SM (G.652D)
结构类型	松套管
不含金属	Yes
加强构件	FRP

尺寸特性


管数	1
光纤数	24
标称外径	6.9 mm
近似重量	156 kg/km

机械特性

耐挤压 (IEC 794-1-E3)	200 N/cm
允许牵引负载	180 daN

使用特性

安装类型	室内/户外
操作温度, 范围	-30...60 °C
敷设时弯曲系数	20 (xD)
存储温度范围	-30...70 °C
防啮齿保护	玻璃纱
环境安装温度, 范围	0...40 °C

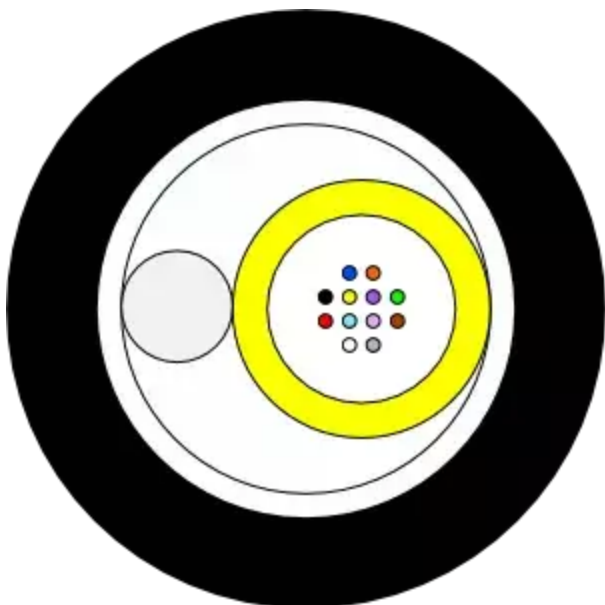

销售和交付信息

Standard Marking

Aginode - MG LSZH - SP1499 - FIBRE OPTIC CABLE - XX*YY - TN - metric

XX = Fibre Count

YY = Fibre Type

TN = Traceability Number