

风管 - 松套管电缆

UNITUBE LSZH CABLE 1X24SM SP1715

Aginode Ref: SP1715


This cable is used for Access, Distribution, City Network and FTTx applications. It is designed to be installed by pulling for indoor and outdoor use.

Characteristics & Applications

- Central strength member reinforcement
- High pulling strength
- All dielectric design
- Waterproof dry core structure
- Zero Halogen
- Non corrosive smoke emission
- Flame non propagation IEC 60332-1

Construction

- Jelly filled central tube containing coloured fibres
- Central FRP strength member
- Glass yarns armoring
- LSZH outer sheath

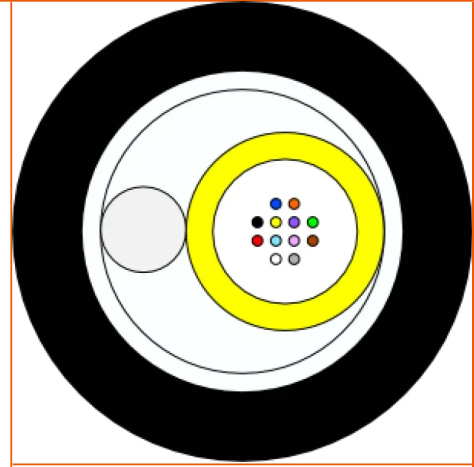

STANDARDS

EN 187000
IEC 60794

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.

Unitube LSZH Cable 1x24SM SP1715

Characteristics

结构特性

铠装类型	玻璃纤维丝
结构类型	松套管
光纤类型	SM (G657.A1)
不含金属	Yes
外护套	低烟无卤
加强构件	FRP

尺寸特性

近似重量	59 kg/km
标称外径	6.9 mm
光纤数	24
管数	1

机械特性

耐挤压 (IEC 794-1-E3)	200 N/cm
允许牵引负载	180 daN

使用特性

环境安装温度, 范围	0...40 °C
敷设时弯曲系数	20 (xD)
安装类型	户外
操作温度, 范围	-30...60 °C
防啮齿保护	玻璃纱
存储温度范围	-30...70 °C