
# 风管 - 松套管电缆

**LOOSE TUBE CABLE 6X12SM SP1976**

**Aginode Ref:** Loose Tube Cable 6x12SM SP1976

This cable is used for Access, Distribution, City Network and FTTx applications.It is designed to be installed by pulling or blowing in ducts.

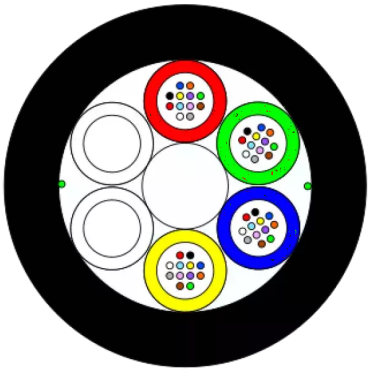

## Characteristics & Applications

- High blowing distance due to the excellent friction properties of the outer sheath
- Central strength member reinforcement
- All dielectric design
- Waterproof dry core structure

## Construction

- Jelly filled tubes containing coloured fibres
- Central FRP strength member
- Low friction outer sheath

## STANDARDS

EN 187000
IEC 60794

*All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.*

# Loose Tube Cable 6x12SM SP1976

## Characteristics

| | |
|---|---|
| **结构特性** | |
| 光纤类型 | SM |
| 铠装类型 | 非铠装 |
| 外护套 | HDPE |
| 不含金属 | Yes |
| 加强构件 | FRP |
| 结构类型 | 松套管 |
| **尺寸特性** | |
| 管数 | 6 |
| 近似重量 | 78 kg/km |
| 光纤数 | 72 |
| 标称外径 | 10.2 mm |
| **机械特性** | |
| 允许牵引负载 | 400 daN |
| 耐挤压 (IEC 794-1-E3) | 200 N/cm |
| **使用特性** | |
| 防啮齿保护 | 无 |
| 操作温度，范围 | -20...70 °C |
| 存储温度范围 | -30...60 °C |
| 安装类型 | 户外 - 管道 |
| 环境安装温度，范围 | -5...50 °C |
| 敷设时弯曲系数 | 20 (xD) |

*All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.*