LANmark-OF 室外铠装光缆UC PE 48-144芯 黑色 亚太地区

LANMARK-OF UC 室外铠装光缆 HDPE 144 芯 单模 9/125 G.652.D 黑色

Aginode Ref: N174.239

适用于管道内或直接埋设

- 波纹钢带铠装
- 凝胶填充管
- 适用于多模和单模光纤
- 提供基础防鼠保护
- 外护套为高密度聚乙烯

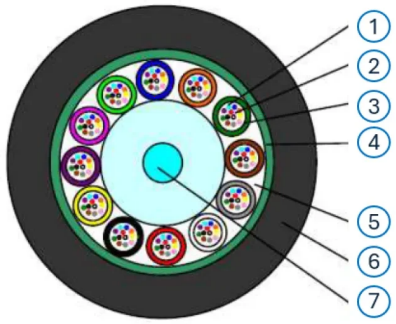

STANDARDS

ANSI/TIA-568-C.3
IEC 60793-2-10
ISO/IEC 11801

说明和应用

安捷诺 LANmark-OF UC 光纤电缆专为室外应用而设计。其结构适合室外直埋使用。它由一个中央强度部件和多个松散管组成。 波纹钢带铠装保护子管。 每个松散管最多可容纳 12C 纤维，该结构最多可容纳 12 个子管。这样既能防鼠，又有很强的抗挤压能力。电缆的外护套为高密度聚乙烯（HDPE）。

结构

截面图附有图例：

1. 光纤（250 微米）
2. 防水凝胶填充物
3. 松套管
4. 防水凝胶填充物
5. 中央加强件
6. 波纹钢带铠装
7. 高密度聚乙烯（HDPE）外护套，含抗紫外线添加剂

特点

- 设计用于拼接端接
- 中央松管设计
- 波纹钢保护
- 防水结构和抗紫外线
- 提供多模和单模光纤
- 可提供 48/72/96/144 芯光纤

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.

LANmark-OF UC 室外铠装光缆 HDPE 144 芯 单模 9/125 G.652.D 黑色

Characteristics

结构特性	
外护套	HDPE
护套颜色	黑
铠装类型	Steel tape
机械特性	
抗冲击性能(IEC 60794-1-E4)	100次冲击/ 3N.M
最大拉力(IEC 60794-1-2-E1)	3000 N
耐挤压 (IEC 794-1-E3)	300 N/cm
使用特性	
存储温度范围	-40...70 °C
操作温度，范围	-40...70 °C
最小弯曲半径 - 动态	288 mm
最小弯曲半径 - 静态	144 mm
环境安装温度，范围	0...40 °C

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.