



Pre-Connectorized Drop Cable (PCDC)

DUAL SHEATH OUTDOOR (PE)/ INDOOR (B2CA) BLACK/GREY - FAÇADE OR AERIAL

Aginode Ref: PCDCJxxxx - SP2069

This cable features a semi-tight buffered colored fiber, reinforced with aramid and water-blocking glass yarns, protected by a white LSZH inner sheath and a UV-resistant PE outer sheath (black or grey). The inner sheath meets CPR Class B2Ca standards.

This cable features a semi-tight buffer construction with a single colored optical fiber, reinforced with aramid yarns for mechanical strength. It includes a white LSZH (low smoke zero halogen) inner sheath and water-blocking glass yarns to protect against moisture. A ripcord is provided for easy access to the cable core, while the outer sheath is made of UV-resistant polyethylene (PE) in black or grey (RAL 7001). The inner cable has a diameter of 2.8mm and complies with CPR Class B2Ca fire performance standards. The 2.8mm inner cable is also available as a stand alone product under the Aginode specification SP2067.

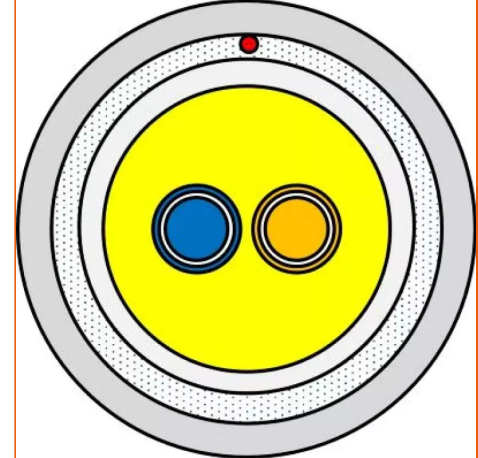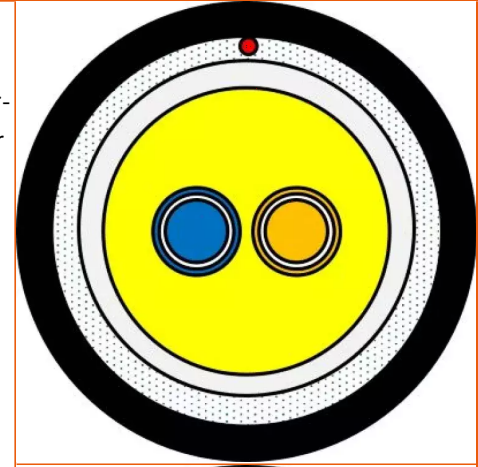

STANDARDS

IEC 60794

IEC 60793

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.

Test methods

All optical measurements at 1550 nm

Test	Conditions	Acceptance criteria
Tension Loading IEC 60794-1-21 E1	Tensile strength: 900N Sample length: ≥50 m, 1 min	$\Delta\alpha \leq 0.1\text{dB}$ under 300N and reversible under 900N
Crush/Compression IEC 60794-1-21 E3	Crush: 20Kg/10cm, 1min Number of tests: 3, at least 20cm apart.	After test, $\Delta\alpha \leq 0.05\text{dB}$ No damage
Impact IEC 60794-1-21 E4	Impact energy: 5Nm number of test: 3	After test, $\Delta\alpha \leq 0.05\text{dB}$ No damage
Torsion IEC 60794-1-21 E7	2m cable, $\pm 180^\circ$	After test, $\Delta\alpha \leq 0.05\text{dB}$ No damage
Bending IEC 60794-1-21 E11A	10 turns, 5 cycles, R=10D	After test, $\Delta\alpha \leq 0.1\text{dB}$ No damage
Water penetration IEC 60794-1-22 F5B	Height of water column: 1m Sample length: 3m, 24h	No water leakage from outside of Inner cable
Temperature cycling IEC 60794-1-22 F1	-40~+60°C, t1=180min, 3 cycles	Increased $\Delta\alpha \leq 0.1\text{dB/km}$

Dual sheath outdoor (PE)/ Indoor (B2Ca) Black/Grey - Façade or aerial

Characteristics

结构特性

颜色	Black / grey
连接器类型	SC/APC LC/APC Hardened Standard (Corning Optitap compatible)
绝缘	是
光纤类型	SM (G657.A2)
纵向防水	Yes
外护套	聚乙烯
电缆类型	Indoor/Outdoor

尺寸特性

近似重量	16 kg/km
Cable Diameter	4.5 mm
光纤数	1...4

机械特性

耐压	20 kg/cm
最大拉力	900 N

传输特性

最大插入损耗, dB	0.25 dB
插入损耗, 典型值	0.12 dB
最小回波损耗, dB	65 dB

使用特性

应用类型	Customer connection
Installation temperature, range	-5...50 (operation -40...70) °C
安装类型	室内/户外
最小弯曲半径 - 工作	R=10D without tension mm
包装	PCDC packaging

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.