

# Pre-Connectorized Drop Cable (PCDC)

SINGLE JACKET - ADSS, PIA - 3.0 MM 1FO

**Aginode Ref:** PCDCBxxxx - SP1952


This robust cable has a semi tight-buffered, colored fiber core, reinforced with aramid and swellable yarns, and protected by a black, UV-resistant TPU outer sheath.

This cable features a tight buffer construction with a single colored optical fiber inside. It is reinforced with aramid yarns, and includes swellable yarns for water-blocking protection. The outer sheath is made of black, UV-resistant thermoplastic polyurethane (TPU), offering excellent durability in outdoor environments.

Breaking load: max 2000N

## PIA Approved

Available with optimized packaging for use with cable dispensers, allowing One-Man Installation

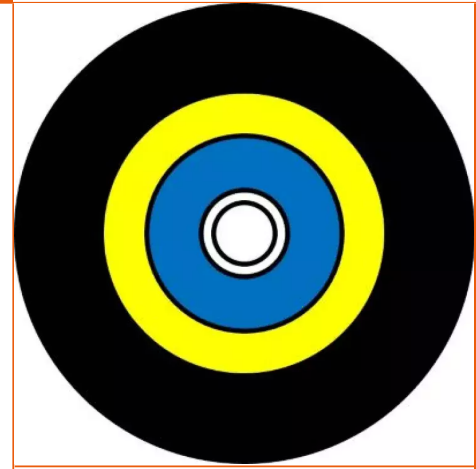

## STANDARDS

IEC 60794  
IEC 60793

## Test Methods

All optical measurements at 1550 nm

Test	Conditions	Acceptance criteria
Tension Loading IEC 60794-1-21 E1	Tensile strength: under 4x cable weight (280N) Sample length: $\geq 50$ m, 1 min	Fiber strian $\leq 0.5\%$ No damage
Crush/Compression IEC 60794-1-21 E3	Crush: 10Kg/cm, 1min Number of tests: 3, at least 20cm apart.	After test, $\Delta\alpha \leq 0.1\text{dB}$ No damage
Impact IEC 60794-1-21 E4	Impact energy: 3Nm number of test: 3	$\Delta\alpha$ reversible No damage
Torsion IEC 60794-1-21 E7	2m cable, $\pm 180^\circ$	$\Delta\alpha$ reversible No damage
Kink IEC 60794-1-21 E10	R=15mm	No kink
Bending IEC 60794-1-21 E11A	10 turns, 5 cycles, R=30mm	After test, $\Delta\alpha \leq 0.1\text{dB}$ No damage
Water penetration IEC 60794-1-22 F5B	Height of water column: 1m Sample length: 3m, 24h	No water leakage
Temperature cycling IEC 60794-1-22 F1	-40~+60°C, t1=180min, 3 cycles	$\Delta\alpha \leq 0.4\text{dB/km}$

# Single jacket - ADSS, PIA - 3.0 mm 1FO

## Characteristics

### 结构特性

颜色	黑
连接器类型	SC/APC LC/APC Hardened Standard (Corning Optitap compatible)
绝缘	是
光纤类型	SM (G657.A2)
外护套	聚氨酯
电缆类型	Aerial

### 尺寸特性

近似重量	7 kg/km
Cable Diameter	2.8 mm
光纤数	1

### 机械特性

断裂强度	Max 2 kN
耐压	10 kg/cm
最大拉力	280 N

### 使用特性

应用类型	Customer connection
Installation temperature, range	-5...50 (operation -40...60) °C
安装类型	架空 - 自承式
最小弯曲半径 - 工作	R=10D without tension mm
包装	PCDC packaging / OMI

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.