

# LIGHTDROP

## LIGHTDROP L - SPLITTER 1:8

**Aginode Ref:** LDSFLA08HQQNA01SC00NASTNANANA


Featuring:

- 8 Hardened Quarter Turn (FastConnect compatible) front ports for customer connections (Ports 1 to 8).
- 1 Hardened Quarter Turn (FastConnect compatible) bottom port for splitter IN.
- Mounting bracket options for overlenght cable storage.

### Terminal max. attenuation\*:

Splitter ratio	Splitter port
1:8	10.70 dB

\*Total terminal attenuation, including insertion losses from pre-connectorization.

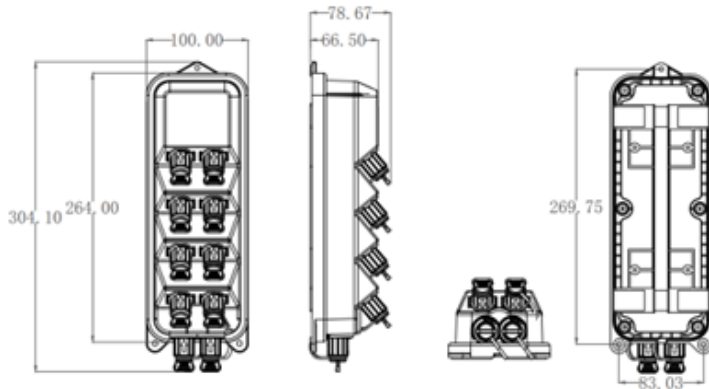

Aginode specification

# LIGHTDROP L - Splitter 1:8

## Characteristics

### 结构特性

颜色	黑
材料	PP

### 机械特性

IK Rating	8
-----------	---

### 使用特性

安装类型	户外
操作温度, 范围	-40...65 °C
包装	箱
RoHS compliant	Yes
抗UV	是
防水	IP 68