

LANmark Power-OF Panel

LANMARK POWER-OF PANEL EQUIPPED

Aginode Ref: NFPP.4LD12M241U.BE

The LANmark Power-OF Panel is designed for hybrid cable terminations, combining optical fiber data splicing and copper power distribution.

- **Optical fiber management**
- **Copper/Power distribution**

The LANmark Power-OF Panel centralizes power and data connections within a single, user-friendly unit. It ensures clear separation between power and data functions while delivering structured, reliable connectivity for hybrid cabling infrastructures. The panel provides 12 available ports.

Data section

- 12 LC Duplex fiber through-adapters for optical data connections
- Supports fiber splicing and high-performance transmission


Power section

- 24 power mechanical fixing push-wires integrated for safe and efficient power distribution
- Covers a maximum operating voltage of 48V

This panel provides a structured solution for environments requiring simultaneous power delivery and high-speed data connectivity. Its design ensures easy installation, access, and maintenance, making it ideal for industrial, smart building, and hybrid network infrastructures.


Key Features

- 12 Ports : 24 Power push wire + 12 LC Duplex fiber adapters in a single panel
- Clear separation of power and data sections
- Fiber splicing (2 cassettes) and LC connectivity
- Copper power distribution with terminals

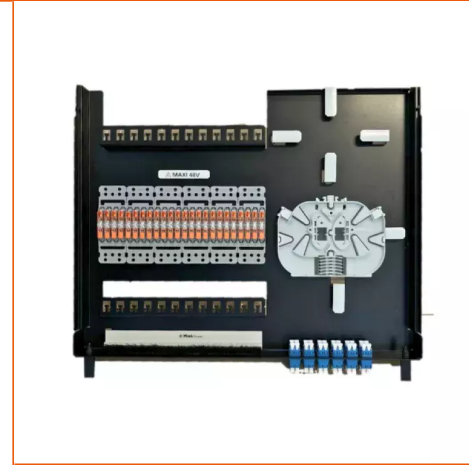

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.

Size Overview

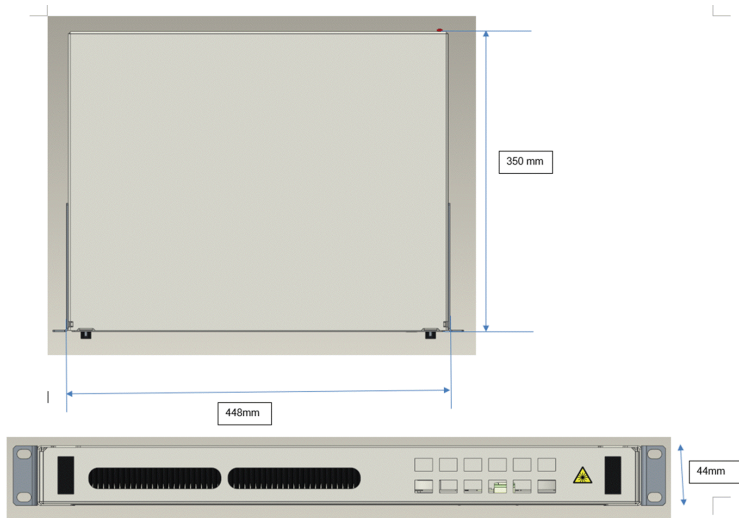

Applications

- Hybrid cabling infrastructures
- Industrial and smart building projects
- Installations requiring both data and power in parallel

LANmark Power-OF Panel Equipped

Characteristics

结构特性

电缆引入线	From the back
颜色	黑
连接器类型	双工LC
Fibre optic type	OS2

尺寸特性

Approximate weight	2.3 Kg
深度	44 mm
高度	350 mm
宽度	448 m

电气特性

Power Type Connector	Push - wire connector
----------------------	-----------------------

使用特性

安装类型	室内
端口数	12



PDF - 3.23 MB

LANmark Power-OF Panel Equipped Notice

下载 ↓

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.