

B-LITE LT - 微型软管电缆

MICROCABLE 6X24 G.657.A1 200MM SP2008 BLITE LT

Aginode Ref: SP2008

This compact cable is used for Access, Distribution, City Network and FTTx applications. It is designed to be quickly installed by blowing in micro-ducts.

Characteristics & Applications

- High blowing distance due to the excellent friction properties of the outer sheath
- Right balance between flexibility and rigidity
- Easy installation with mid span access possibility
- Central strength member reinforcement
- All dielectric design
- Waterproof structure


Construction

- Jelly filled microloose tubes containing coloured fibres
- Central FRP strength member
- Very Low friction outer sheath

Standard Marking

Aginode - FIBRE OPTIC CABLE - SP2008 - 6*24 G657A1 - TN - metric

TN = Traceability Number

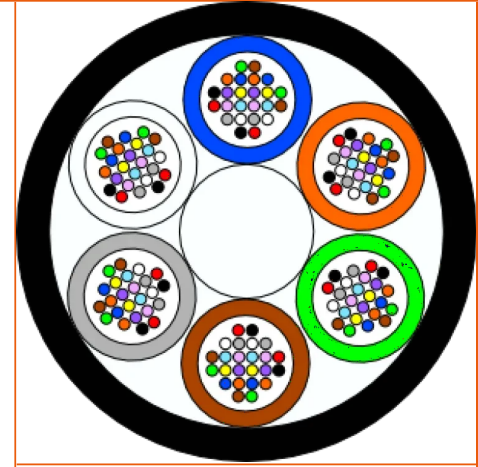

STANDARDS

EN 187000
IEC 60794

Microcable 6X24 G.657.A1 200µm SP2008 BLite LT

Characteristics

结构特性

结构类型	多束管
光纤类型	G657A1 - 200 µm
不含金属	Yes
外护套	HDPE
加强构件	FRP

尺寸特性

近似重量	28 kg/km
标称外径	5.7 mm
光纤数	144
管数	6

机械特性

耐挤压 (IEC 794-1-E3)	100 N/cm
允许牵引负载	50 daN
操作时最大拉力负载	20 daN

使用特性

环境安装温度, 范围	0...40 °C
敷设时弯曲系数	20 (xD)
安装类型	户外 - 可吹缆的微管
操作温度, 范围	-30...60 °C
存储温度范围	-40...70 °C