


# FLOORDROP

## FLOORDROP SPLICE

**Aginode Ref:** FDSFLA10SCNANA00NA00NANANANANANA

FLOORDROP is designed as the termination point of the Access Network on each floor of buildings with multiple households. It acts as a mutual connection hub, equipped with SC/APC connectors and pigtails. The unit supports pass-through distribution cables for easy integration into existing infrastructure.

It features a 24-fiber splice tray and a patch panel that accommodates up to 10 SC/APC adapters. For improved accessibility, the adapters can be slightly tilted upward. The enclosure is suitable for both indoor and outdoor environments and complies with IP65 protection standards. The box is compatible with passive optical components such as splitters and TAPs. Its port capacity makes it ideal for plug-and-play deployments, especially in TAP-based rollouts requiring fast and seamless installation. The demarcation between Access Network and Subscribers is made by means of 2 differentiated areas that can be secured independently.

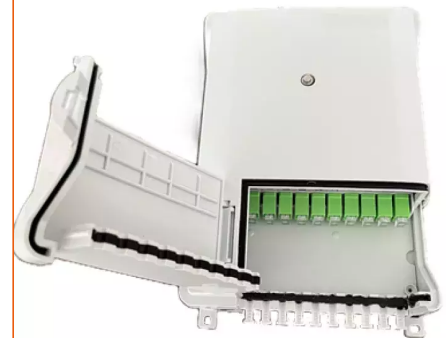

IEC 61753-1

*All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.*

# FLOORDROP Splice

## Characteristics

### 结构特性

光纤类型	G.657 A2
------	----------

### 尺寸特性

深度	50 mm
----	-------

高度	235 mm
----	--------

宽度	125 mm
----	--------

### 机械特性

IK Rating	9
-----------	---

### 使用特性

耐火	UL 94 V0
----	----------

防水	IP 65
----	-------