


语音大对数电缆（亚太区）

语音 U/UTP 25 对 AWG24 CAT 5E LSZH 橙色 1000 米，卷盘装

Aginode Ref: N100.M22

- 25对大对数电缆
- 5e 类
- 适用于高达 100 Mhz 的语音和数据应用
- 橙色 LSZH 护套

Aginode Ca5 5e 多对电缆的测试频率高达 100Mhz，适用于语音应用和其他频率高达 100Mhz 的应用。

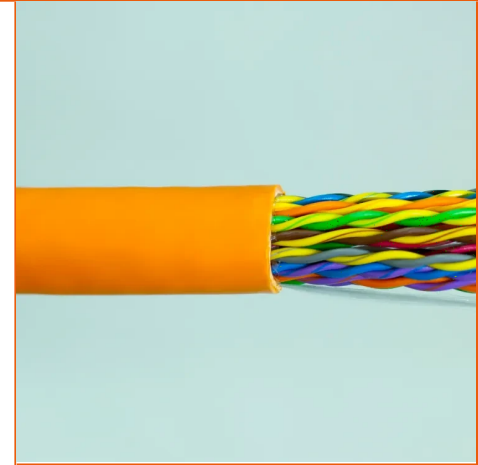

STANDARDS

ANSI/TIA-568-C.2
ISO/IEC 11801

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.

语音 U/UTP 25 对 AWG24 Cat 5e LSZH 橙色 1000 米，卷盘装

Characteristics

结构特性

屏蔽	无
外护套	低烟无卤
护套颜色	橙
绝缘材料	PE
电缆类型	U/UTP
导体材料	裸铜线

尺寸特性

线对数	25
导体横截面尺寸 (AWG)	24
标称外径	12.5 mm

电气特性

互电容	56 nF/km
特性阻抗	100 Ohm

机械特性

最大拉力(IEC 60794-1-2-E1)	300 N
------------------------	-------

传输特性

衰减在16MHz	8.2 dB/100m
衰减在1MHz	2 dB/100m

使用特性

操作温度, 范围	-20...60 °C
最小弯曲半径 - 动态	125.0 mm
类型	Cat. 5e
阻燃 - 火焰	IEC 60332-1
环境安装温度, 范围	0...50 °C

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.