
Mikrokabel mit zentraler Bündelader

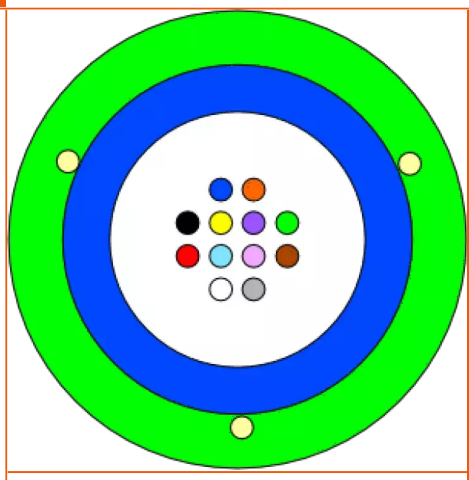

Die Mikrokabel mit zentraler Bündelader werden für FTTx Anwendungen im Aussenbereich verwendet.

Diese Kabel sind für das Einblasen in Miniröhrchen konzipiert.

Eigenschaften

- Hohe Einblaslängen dank geringem Reibungskoeffizienten des Außenmantels
- Optimierte Kabelsteifigkeit bei gleichzeitiger Flexibilität
- Mit Aramidgarnen verstärkt
- Metallfrei
- Wasserdichte Struktur

Fasertypen

Die Kabel können mit verschieden Fasertypen geliefert werden

STANDARDS

EN 187000
IEC 60794

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.

Mikrokabel mit zentraler Bündelader

EIGENSCHAFTEN

Konstruktionsmerkmale	
Farbe	grün
Fasertyp	SM
Metallfrei	Yes
Leitungsaufbau	Unitube
Abmessungsmerkmale	
Anzahl der Bündel	1
Anzahl der optischen Fasern	12
Mechanische Eigenschaften	
Querdruckwiderstand (IEC 794-1-E3)	200 N/cm
Anwendungsmerkmale	
Lagertemperatur, Bereich	-40...70 °C
Art der Installation	Outdoor - Microduct blowable
Umgebungstemperatur, Bereich	0...40 °C
Biegefaktor bei Verlegung	20 (xD)

Verkauf & Lieferung Informationen

Standard Marking

Aginode - FIBRE OPTIC CABLE - B-Lite SPxxxx - XXxYY - FB - TN - metric

XX = Fibre Count
YY = Fibre Type
FB = Frameries, Belgium (manufacturing place)
TN = Traceability Number

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.

Product list

	Aginode ref.	Country ref.	Name	Farbe	Fasertyp	Anzahl der optischen Fasern	Anzahl der Bündel
	SP1089	-	Mikrokabel 1x12SM SP1089 B-LITE	grün	SM	12	1
	SP1108	-	Mikrokabel 1x6SM SP1108 B-LITE	grün	SM	6	1
	SP1604	-	Mikrokabel 1x12SM SP1604 B-LITE	Schwarz	SM	12	1
	10561406	-	Mikrokabel 1x4SM G657A1 SP1108 B-LITE	Schwarz	SM (G657.A1)	4	1
	SP1707	-	Mikrokabel 1x12SM SP1707 B-LITE	Schwarz	SM (G657.A1)	12	1
	SP1806	-	Mikrokabel 1x12SM SP1806 B-LITE	Schwarz	SM	12	1
	14500878	-	Microcable 1x4 G657A1 SP1707 B-LITE (N)	grün	SM (G657.A1)	4	1
	SP2015	-	Microcable 1x24SM 200µm SP2015	Schwarz	G657A1 - 200 µm	24	1
	Microcable 1X24 G657A1 SP2060 B-LITE	-	Mikrokabel 1X24 G657A1 SP2060 B-LITE	Schwarz	SM (G657.A1)	24	1

= Make to order, = In Stock

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.