
Outlets: @XS-FAST

- **Up to 2 SC/LC adapters**
- Wall mounted, on flush box, on a DIN rail and on most of the electrical equipment mounting supports on the market
- No cover-opening to fix the outlet
- **Ready-to-fix** kit in option



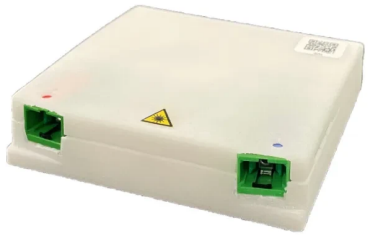

STANDARDS

Aginode specification

Application

Optical Terminal Outlets (OTOs) are used in the context of FTTH for collective housing or residential housing.
Mounted on the customer's premises on a DIN rail in a communication device or on a wall (possibly on a flush-mounted box) in a room or outbuilding of the dwelling room or outbuilding.
The OTO can be used as a DTIO and is then a termination point for the operator's access network.

Functional characteristics

The OTO can be fitted with a pre-connected L1080, L1081, L1082, L1083, L1087 or L1088 drop cable from either side or from the rear or with field connectors. Equipped with a splicing support and coiling zone, this outlets allows fibre-to-fibre connection to a pre-installed pigtail.

Supplied with a multi-support plate, the outlet can be mounted on the wall, on a flush-mounted box, on a DIN rail and on most of the electrical equipment mounting supports on the market.

The optical cable is located at the bottom of the OTO with an internal or external shutter that ensures protection against laser emission and dust.

Components

The packaging bag contains :

- An outlet
- A multi-support plate to secure the outlet
- A pre-installed SC adapter

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.

- A pre-installed coloured SC/APC pigtail

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.

Outlets: @XS-FAST

EIGENSCHAFTEN

Konstruktionsmerkmale	
Farbe	White RAL 9010
Abmessungsmerkmale	
Tiefe	18 mm
Höhe	80 mm
Maximale Anzahl von Adaptern	2
Anzahl Spleiße	2
Breite	80 m
Mechanische Eigenschaften	
IK-Bewertung	5
Anwendungsmerkmale	
Adapter	SC/LC
Feuerbeständig	UL 94 V0
Mindestbiegeradius bei statischem Einsatz	15 mm
Betriebstemperatur	-5...45 °C
UV Beständigkeit	Ja
Watertightness	IP 50

Resources

Notice @XS-OUTLET FAST.pdf pdf — 5.26 MB Herunterladen

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.

Product list

Aginode ref.	Country ref.	Name
TBD	-	Outlets: @XS-FAST

= Make to order, = In Stock

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.