

Power To The Antenna D-CORE - Eca (N2XCY)

POWER TO THE ANTENNA D-CORE - ECA 16MM²

Power To The Antenna D-CORE is a shielded dual conductor power cable. It can be used as a DC power cable for the interconnexion between Base Unit and Radio Units on mobile towers or rooftops. The D-shape of the isolated conductors enables to reduce the diameter and weight of these cables with no negative impact on the properties. It also has best-in-class flexibility.

Applications

- Power cable 0.6/1.0 kV
- For indoor/outdoor applications
- Used on mobile phone masts


Cable construction

1. Bare conductor strand - Class 5
2. Insulation (IEC 60811-1)XLPE
3. Longitudinal ALU/PET tape
4. Tinned copper braid (Coverage US >65%)
5. Outer sheath: HFFR - Black - Eca (EN50575)

Environment

Designed to reduce the environment impact, Aginode cables are compliant with RoHS 2011/65 Directive and European Reach 1907/2006/EC regulation.

D-CORE Picture

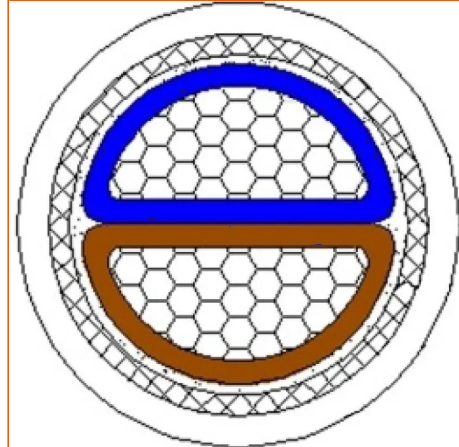

STANDARDS

- EN 50575
- IEC 60228
- IEC 60332-1
- IEC 60502-1

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.

Power To The Antenna D-CORE - Eca 16mm²

Eigenschaften

Konstruktionsmerkmale

Schirm	Polyester tape - tinned copper braid
Außenmantel	LSZH
Mantelfarbe	Schwarz
Aderfarbe	Blue - Brown
Leitermaterial	Bare copper class 5
Isolierung	VPE

Abmessungsmerkmale

Nettogewicht ca.	430 kg/km
Aussendurchmesser	13 mm
Aderanzahl	2
Leiterquerschnitt	16 mm ²
Durchmesser über Isolierung, Bereich	5.9...6.1 mm

Elektrische Eigenschaften

Max. Gleichstromwiderstand des Leiters bei 20° C	1.95 Ohm/km
Minimaler Isolationswiderstand	10 MOhm.km
Breakdown voltage Vcc, 5 min.	3500.0 V

Anwendungsmerkmale

Korrosivität der (Brand-)Gase	IEC 60754-1; IEC 60754-2
Betriebstemperatur	-40...90 °C
Flammwidrig	IEC 60332-1
Rauchdichte	EN/IEC 61034-2
Verpackung	Trommel 500m
Lagertemperatur, Bereich	-40...50 °C
Biegefaktor bei Verlegung	8 (xD)
Biegefaktor nach Verlegung	4 (xD)

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.