

# IN AND OUT IP Cable

AGINODE CAT6A U/FTP 4P IN/OUT ECA 500M

**Aginode Ref:** 13200561

**EAN:** 3760400091851

## Benefits

- Excellent performance : Cable compliant with IEC 61156-5 CAT6A (channel 100m)
- System : compliant with EA class according to ISO/IEC 11801 & EN 50173 performances
- Time saving solution: universal installation in&out thanks to his specific LSZH jacket
- Security : flame retardant IEC 60332-1 and Eca level according to EN50575:2014+A1:2016 and IEC 60332-1
- Ccompatible with RJ45 CAT6A connector thanks to his awg23 gauge
- Immunity : PIMF construction for better EMC performance
- Compatible POE, POE+ and POE++
- Environmental : RoHS EC Directive and European Reach compliant

## Application


- suitable to connect all IP equipment : indoor and outdoor
- perfect cable for link configuration such as MPTL
- the special jacket guarantee a very good UV and humidity resistance and also a LSZH compliance

The AWG23 wire diameter authorize direct connection with RJ45 connector and field plug to make the installation quicker and easier.

Manufactured in accordance with IEC 61156-5 transmission requirements, the U/FTP cable is the best choice to support 10Gigabit Ethernet in channel configurations and MPTL link. Thanks to his special jacket this is the perfect solution for smart city and smart building applications such as video security applications, outdoor and indoor wifi access point, IP dynamic screen, urban automation systems etc.

## Construction

- conductor : solid bare copper
- insulation : polyethylen (EN 50290-2-23) - two insulated conductors twisted to a pair
- screen : Alu/PET on each pair, alu outside - 4/2 laid up together

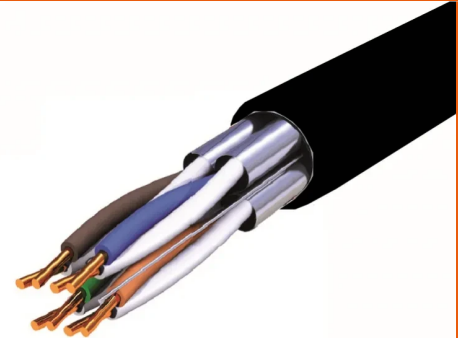

## STANDARDS

EN 50173  
EN 50288  
EN 50575  
IEC 61156-6  
ISO/IEC 11801

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.

- outer jacket : In&Out Eca (EN50575)

## Environment

Designed to reduce the environment impact, Aginode cables are compliant with RoHS 2011/65 Directive and European Reach 1907/2006/EC regulation. The outer sheath of the cable is made of halogen free material (IEC 60754-1 / EN 50267-2-1), with limited smoke emissions (IEC 61034-1/2 / EN 50268-1/2) and no acide gaz emissions in case of fire (IEC 60754-2 / EN 50267-2-2).

Aginode measure the environmental impact of each cable. Upon request, PEP Ecopassport or the Eco Material Declaration could be available

## Related product

Part Number	Description	Packaging
N420.66A	LANmark-6A Evo Snap-in Connector Category 6A Screened	24 in individual polybag
N420.66A-ECO24	LANmark-6A Evo Snap-in Connector Category 6A Screened ECO	24 in 0 plastic "eco-friendly" packing
N420.66A-BULK100	LANmark-6A Evo snap-in connector Category 6A screened BULK	Bulk 100 in polybag
N10G.CONSS	LANmark-10G Snap-in connector Category 6A Screened	24 in individual polybag
N490.001	LANmark-6A Field Terminable Plug Category 6A Screened	24 in individual polybag

# AGINODE CAT6A U/FTP 4P In/Out Eca 500m

## Eigenschaften

### Konstruktionsmerkmale

Außenmantel	In & out
Mantelfarbe	Schwarz
Halogenfrei	Ja
Higher heating value	493 MJ/km
Kabeltype	U/FTP
Shielding	Verzinntes Kupfergeflecht, Bedeckung >= 80%
Einzel geschirmt	Aluminium / Polyester tape
Gemeinsamer Schirm	Tinned copper braid

### Abmessungsmerkmale

Nettogewicht ca.	49 kg/km
Anzahl Paare	4
Abmessung (AWG)	23
Durchmesser über Isolierung	1.32 mm
Außendurchmesser, nom.	7.0 mm
Außenabmessungen	Not applicable

### Elektrische Eigenschaften

Max. Gleichstromwiderstand des Leiters bei 20° C	75 Ohm/km
Characteristic impedance at 100 MHz	100 Ohm

### Mechanische Eigenschaften

Maximale Zugspannung bei Installation	80 N
---------------------------------------	------

### Übertragungseigenschaften

Ausbreitungsgeschwindigkeit	0.82 %
Kopplungsämpfung bei 30 MHz	>70 dB
Typical maximum time delay	450 ns/100m
Typical maximum delay skew for conductor	536 ns/100m
Typical maximum delay skew for pair	540 ns/100m

### Anwendungsmerkmale

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.

Einsatzbereich	Innen- und Ausseninstallationen
Witterungsbeständig	Excellent
Flammwidrig	IEC 60332-1
Rauchdichte	Ja
Verpackung	Trommel 500m
Umgebungstemperatur bei Verlegung, Bereich	-25...50 °C
Biegefaktor bei Verlegung	8 (xD)
Biegefaktor nach Verlegung	4 (xD)
Temperaturbereich bei fester Verlegung	-40...75 °C

## Erklärung zur Leistung

AGINODE CAT6A U/FTP 4P In/Out Eca 500m pdf — 116.54 KB [Herunterladen](#) ↓