
# LANmark-OF Loose Tube Universal 48 - 72 - 96 & 144FO - Cca

**LANMARK-OF LOOSE TUBE UNIVERSAL 144XMULTIMODE 50/125 OM3 LSZH CCA AQUA**

**Aginode Ref:** N165.LTUN144-AC

- Loose Tube Universal optical fibre cable with high-level transmission: OM3
- High fire performance: Reaction to fire Cca according to EN50575:2014+A1:2016
- Indoor/Outdoor cable
- Designed for splicing with pigtails

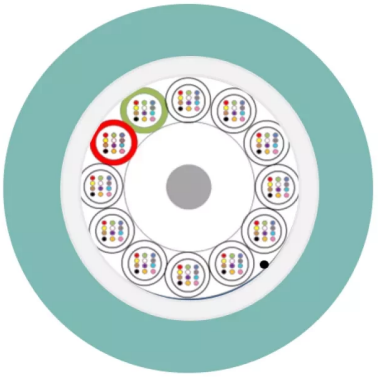

## STANDARDS

ISO/IEC 11801

The new **144FO OM3 Loose Tube technology** from Aginode is specifically engineered for indoor buildings & outdoor where installations require both high performance and fire safety. Designed with a loose tube construction, it offers excellent protection for fibers against mechanical stresses and environmental factors.

- **CPR (Cca s1a, d1, a1):** Low fire propagation, reduced smoke emission, and minimal toxic gas release.
- **Loose Tube Construction:** Excellent fiber protection against mechanical stress and temperature variations.
- **Indoor & Outdoor installation :** Ideal for structured cabling in residential, commercial, and public buildings, with environmental resistance for exposed sections.
- **High Performance OM3:** Reliable, high-speed data transmission over long distances.
- **Flexible and Robust**
- **UV-Resistant & Waterproof**: Designed to withstand outdoor conditions when required.

The central tube contains up to 144 fibers organized in 12 bundles of 12 fibers, each clearly identified to simplify installation.

**Applications:**

- Building backbone networks
- Data centers
- Indoor/Outdoor cable

*All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.*

# LANmark-OF Loose Tube Universal 144xMultimode 50/125 OM3 LSZH Cca Aqua

## Eigenschaften

| | |
|---|---|
| **Konstruktionsmerkmale** | |
| Leitungsaufbau | Loose Tube |
| Fasertyp | OM3 50/125 |
| Halogenfrei | IEC 60754-2 |
| Verwendetes Material für Längswasserdichtigkeit | Jelly |
| Außenmantel | LSZH |
| **Abmessungsmerkmale** | |
| Nettogewicht ca. | 240 kg/km |
| Außendurchmesser, nom. | 15.0 mm |
| Anzahl der optischen Fasern | 144 |
| Anzahl der Bündel | 12 |
| **Mechanische Eigenschaften** | |
| Querdruckwiderstand (IEC 794-1-E3) | 2000/10 N/cm |
| Max. Zugkraft (IEC 60794-1-2-E1) | 1800 N |
| Mechanical resistance to impacts (IEC 60794-1-E4) | 20 N · m |
| Nenndauerzugfestigkeit | 0.6 kN |
| **Anwendungsmerkmale** | |
| Flammwidrig | IEC 60332-3-24 |
| Umgebungstemperatur, Bereich | -20...60 °C |
| Art der Installation | Indoor/Outdoor |
| Dynamischer Mindestbiegeradius während Anwendung | 300 mm |
| Mindestbiegeradius bei statischem Einsatz | 150 mm |
| Betriebstemperatur | -40...70 °C |
| Rauchdichte | IEC 61034-2 |
| Lagertemperatur, Bereich | -30...60 °C |
| UV Beständigkeit | Ja |

*All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.*

## DoP: Declaration of Performance

DOP_LTUN_144XSM OM3_Cca.pdf pdf — 59.2 KB  Herunterladen

*All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.*