

LANmark-OF TB LSZH 48-96C - APAC Region

Tight buffered optical fibre cables

- Indoor cable designed for backbone/horizontal installation
- All fibre grades
- Low Smoke Zero Halogene (LSZH)

Description and Application

Aginode LANmark-OF TB Indoor fibre cable is designed for indoor applications. The fibre cable has 900µm tight buffered fibres with flame sheath around the transmission medium, and the 900µm sheath provides additional protection for the fibres. The cable is coated with aramid yarns as the strength member, and the outermost layer is coated with LSZH jacket. Bend Insensitive OM3/OM4 and SingleMode G.652.D and G.657.A1 are available.


The fibre cable is of a dry structure suitable for horizontal or vertical installation. The fibre cable meets the needs of indoor fire protection and can be installed in ducts.

- Can be installed both vertically or horizontally
- Applicable as standard multimode and singlemode fibre
- Central FRP strength member
- Up to 8 sub tube, each contain 12c fibres
- LSZH Jacket
- Tight buffered fibre for easy stripping

Construction

Legend accompanying the cross section drawing for 48-96core OF cable:

1. 900µm Tight buffered fibre
2. Aramid yarn
3. Subunit jacket
4. Central FRP Strength member
5. LSZH jacket materials

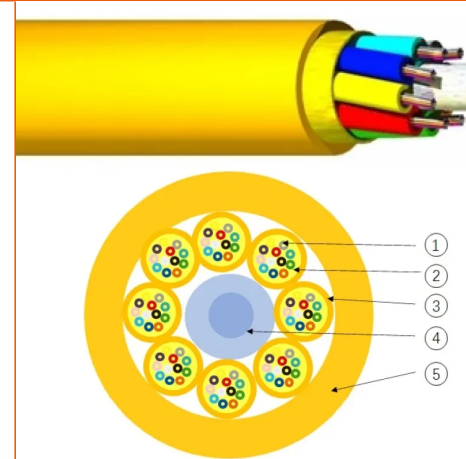

STANDARDS

- ANSI/TIA-568-C.3
- IEC 60332-1
- IEC 60332-3-24 Cat.C
- IEC 60793-2-10
- ISO/IEC 11801

LANmark-OF TB LSZH 48-96C - APAC Region

CARACTÉRISTIQUES

Caractéristiques de construction

Couleur	Jaune
Type de fibres optiques	SM (G.652D)
Porteur central	Central FRP
Number of tube layer 1	4

Caractéristiques dimensionnelles

Diamètre extérieur	14.8 mm
Nombre de fibres optiques	48

Caractéristiques mécaniques

Résistance mécanique aux chocs (IEC 60794-1-E4)	100 impacts of 1 N.m
Crush resistance (IEC 60794-1-E3)	1000 N/100mm
Maximum pulling force (IEC 60794-1-2-E1)	1500 N

Caractéristiques d'utilisation

Température ambiante d'utilisation, plage	-20...60 °C
Rayon de courbure minimum en utilisation dynamique	296.0 mm
Rayon de courbure minimum en utilisation statique	148 mm
Température de stockage, plage	-30...70 °C
Température ambiante d'installation, plage	0...40 °C

Product list

	Aginode ref.	Country ref.	Name
☎	N174.037	-	LANmark-OF Tight Buffer LSZH SM G.652.D 48C YELLOW
☎	N177.043	-	LANmark-OF Tight Buffer LSZH OM4 72C AQUA
☎	N177.049	-	LANmark-OF Tight Buffer LSZH OM4 96C AQUA
☎	N174.049	-	LANmark-OF Tight Buffer LSZH SM G.652.D 96C YELLOW
☎	N174.043	-	LANmark-OF Tight Buffer LSZH SM G.652.D 72C YELLOW
☎	N175.049	-	LANmark-OF Tight Buffer LSZH OM3 96C ORANGE
☎	N175.037	-	LANmark-OF Tight Buffer LSZH OM3 48C ORANGE
☎	N177.037	-	LANmark-OF Tight Buffer LSZH OM4 48C AQUA
☎	N175.043	-	LANmark-OF Tight Buffer LSZH OM3 72C ORANGE

☎ = Make to order, 📦 = In Stock