

LANmark-OF TB LSZH 2-24C - APAC Region

LANMARK-OF TIGHT BUFFER LSZH SM G.652.D 8C YELLOW

Aginode Ref: N174.023

Tight buffered optical fibre cables

- Indoor cable designed for backbone/horizontal installation
- All fibre grades
- Low Smoke Zero Halogene (LSZH)

Description and Application

Aginode LANmark-OF TB Indoor fibre cable is designed for indoor applications. The fibre cable has 900µm tight buffered fibres with flame sheath around the transmission medium, and the 900µm sheath provides additional protection for the fibres. The cable is coated with aramid yarns as the strength member, and the outermost layer is coated with LSZH jacket. Bend Insensitive OM3/OM4 and SingleMode G.652.D and G.657.A1 are available.


The fibre cable is of a dry structure suitable for horizontal or vertical installation. The fibre cable meets the needs of indoor fire protection and can be installed in ducts.

- Can be installed both vertically or horizontally
- Applicable as standard multimode and singlemode fibre
- LSZH Jacket
- Tight buffered fibre for easy stripping

Construction

Legend accompanying the cross section drawing for 2-24core OF cable:

1. 900µm Tight buffered fibre
2. Aramid yarn
3. LSZH jacket materials

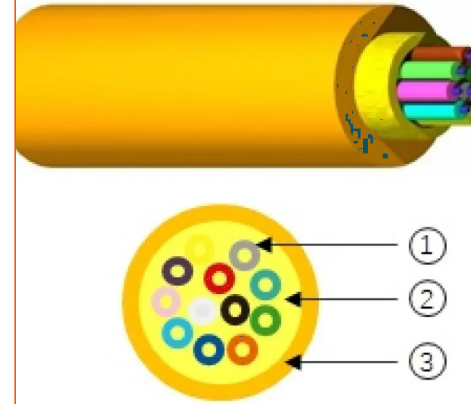

STANDARDS

- ANSI/TIA-568-C.3
- IEC 60332-1
- IEC 60332-3-24 Cat.C
- IEC 60793-2-10
- ISO/IEC 11801

LANmark-OF Tight Buffer LSZH SM G.652.D 8C YELLOW

Caractéristiques

Caractéristiques de construction

Couleur	Jaune
Type de fibres optiques	SM (G.652D)

Caractéristiques dimensionnelles

Diamètre extérieur	5.8 mm
Nombre de fibres optiques	8

Caractéristiques mécaniques

Résistance mécanique aux chocs (IEC 60794-1-E4)	100 impacts of 1 N.m
Crush resistance (IEC 60794-1-E3)	1000 N/100mm
Maximum pulling force (IEC 60794-1-2-E1)	900 N

Caractéristiques d'utilisation

Température ambiante d'utilisation, plage	-20...60 °C
Rayon de courbure minimum en utilisation dynamique	116.0 mm
Rayon de courbure minimum en utilisation statique	58 mm
Température de stockage, plage	-30...70 °C
Température ambiante d'installation, plage	0...40 °C