
ウォールドロップ V2

WALLDROP V2拡張キット

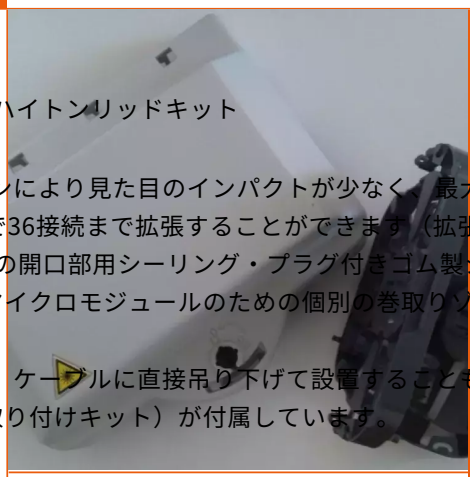

Aginode Ref: 10280448

12OFスプライストレー2枚と蓋を追加することで、12OFバージョンのスプライス容量を増やすハイトンリッドキット

WALLDROPボックスは、光ケーブルの配線を可能にするために設計されています。そのデザインにより見た目のインパクトが少なく、最大
標準仕様として12接続用のスプライスカセットを装備しており、接続を中断することなく現場で36接続まで拡張することができます（拡張
ドロップ・ケーブル・エントリーには、3〜7mm（3〜5mmと5〜7mmをシールする2タイプ）の開口部用シーリング・プラグ付きゴム製
オーガナイザートレイは、メインケーブルと加入者接続部から取り出されたファイバーまたはマイクロモジュールのための個別の巻取りソ
スプライスカセットには1x4ベアファイバースプリッター用のスロットがあります。
WALLDROPボックスは、設置場所に応じて水平にも垂直にも取り付けることができます。また、ケーブルに直接吊り下げて設置することも
製品には、設置に必要なすべての付属品（コーム、カセット、シール、プラスチックタイ、壁取り付けキット）が付属しています。
ライトグレーとブラックの2色からお選びいただけます。



STANDARDS

Aginode specification

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.

WALLDROP V2拡張キット

Characteristics

Construction characteristics	
Colour	Light grey RAL 7035
Material	Thermoplastic
Dimensional characteristics	
Height	70 mm
Width	138 mm
Length	203 mm
Max. number of cables	10
Max. number of cassettes	2
Splice number	24
Diameter main cable	6...12 mm
Diameter branch cable	3...7 mm
Mechanical characteristics	
IK Rating	8
Usage characteristics	
Operating temperature, range	-40...65 °C
Minimum static operating bending radius	15 mm
U.V resistance	Yes
Packaging	Box
Installation type	Outdoor
RoHS compliant	Yes
Watertightness	IP 55

ドキュメンテーション

Instruction manual pdf — 5.25 MB　ダウンロード

Leaflet Facade Solution EN pdf — 5.07 MB　ダウンロード

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.