
Outlets: @XS-FAST

OUTLETS: @XS-FAST

Aginode Ref: TBD

- Up to 2 SC/LC adapters
- Wall mounted, on flush box, on a DIN rail and on most of the electrical equipment mounting supports on the market
- No lid-opening to fix the outlet
- Ready-to-fix kit in option

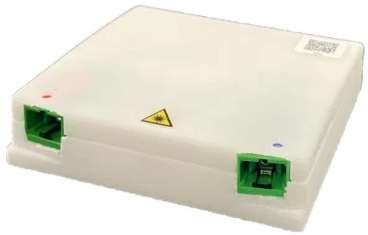

Application

By default, it is designed for flush wall mounting. It can also be adapted for use with DIN rails and most standard electrical mounting systems available on the market by means of an optional adapter plate. The @XS-FAST can additionally serve as a DTIO, acting as the termination point of the operator's access network.

STANDARDS

Aginode specification

Functional characteristics

The OTO can be installed with a pre-connected drop cable entering from either side, the bottom, or the rear. It features a dedicated splicing area and fibre management zone, enabling cable-to-cable or cable-to-pigtails splicing.

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.

Outlets: @XS-FAST

Characteristics

Construction characteristics	
Colour	White RAL 9010
Material	Thermoplastic
Dimensional characteristics	
Depth	18 mm
Height	80 mm
Maximum number of adaptators	2
Splice number	2
Width	80 m
Mechanical characteristics	
IK Rating	5
Usage characteristics	
Adaptor	SC/LC
Fire resistant	UL 94 V0
Minimum static operating bending radius	15 mm
Operating temperature, range	-5...45 °C
Packaging	Paper bag
U.V resistance	Yes
Watertightness	IP 50

Notice @XS-OUTLET FAST.pdf pdf — 5.26 MB　ダウンロード

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.