

UPSKY™ D-CORE unshielded dual copper conductor cable

UPSKY™ D-CORE UNSHIELDED 2X25MM² LSZH ECA 500M

Aginode Ref: 13200751

An Eca CPR compliant range for outdoor and indoor 4G/5G applications.

Power To The Antenna D-CORE is a unshielded dual conductor power cable. It can be used as a DC power cable for the interconnexion between Base Unit and Radio Units on mobile towers or rooftops. The D-shape of the isolated conductors enables to reduce the diameter and weight of these cables with no negative impact on the properties. It also has best-in-class flexibility.

Applications


- Power cable 0.6/1.0 kV
- For indoor/outdoor applications
- Used on mobile phone masts

Cable construction

1. **Bare conductor strand - Class 5**
2. **Insulation** (IEC 60811-1)XLPE
3. **Longitudinal ALU/PET tape**
4. **Outer sheath:** Eca
HFFR - Black

Environment

Designed to reduce the environment impact, Aginode cables are compliant with RoHS 2011/65 Directive and European Reach 1907/2006/EC regulation.

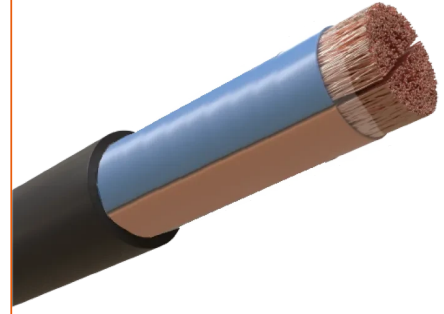

EN 50575 IEC 60228 IEC 60502-1 NF
C15-100

UPSKY™ D-CORE unshielded 2x25mm² LSZH Eca 500m

Characteristics

Construction characteristics

| | |
|--------------------|----------------------|
| Cross section | 2x25 mm ² |
| Outer sheath | LSZH Eca |
| Sheath colour | Black |
| Conductor material | Bare copper class 5 |
| Insulation colour | Blue - brown |

Dimensional characteristics

| | |
|------------------------|--------------|
| Copper weight | 432.43 kg/km |
| Number of cores | 2 |
| Approximate net weight | 650 kg |

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.