

Distribution - Tight cables Dca

TBU LSZH 24XSM G652D SP1724 BK

Aginode Ref: 10239188

Tight Buffer cable - 24 fibres

This tight buffer cable is designed for indoor/outdoor installation.

This cable has an outstanding fire behaviour.

Direct connectorization is made easy with 900µm buffered structure.

This cable can be operated under a large temperature range.

Design

The TBU LSZH* SP1724 cable has a central strength member (FRP: Fibre Reinforced Plastic), with 24 900µm buffered structure around. The design is reinforced by a layer of glass yarns and a LSZH* sheath.

Fibre type

The TBU LSZH* SP1724 cable is available with multimode and singlemode fibres.


Technical performances

The tight buffer cable performances are specified in the following tables.

Additional details

This cable is provided as a standard with a black sheath, other sheath colours are also available. Long exposure to UV with these other colours could generate colour fading.

Black or colored stripes are used for the fibre identification from position 13 to 24.

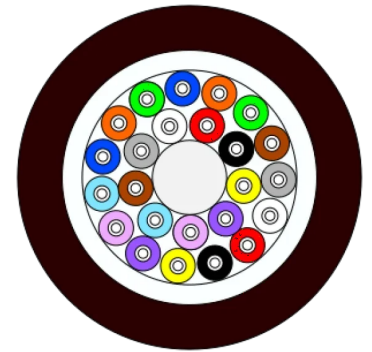

STANDARDS

EN 50399 D

IEC 60332-1

IEC 60332-3

IEC 60754-1

IEC 60794

IEC 61034

NF C32-070/C1

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.

* LSZH: Low Smoke Zero Halogen.

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.

TBU LSZH 24xSM G652D SP1724 BK

Characteristics

구조적 특성

색상	검은색
Fiber optic type	SM (G.652D)
피복	저연 할로겐 프리
Halogen free	IEC 60754-1
Material used for longitudinal water tightness	Watertight glass yarns
Metal free	Yes
Strength member	FRP 센터 보강재
구조	Multi Tight
Additional strength member	유리사

치수

무게(근사치)	71 kg/km
Number of optical fibres	24
Cable Diameter, range	... mm
Number of optical fibres, range	...
Nominal outer diameter (mm)	7.8 mm

기계적 특성

Mechanical resistance to impacts	10 impacts of 3 N.m
Maximum permanent tensile load	0.45 kN
Crush resistance (IEC 60794-1-E3)	100 N/cm
Maximum installation tension	1500 N

사용 특성

操作温度范围	-40...70 °C
Fire retardant	IEC 60332-3
Minimum static operating bending radius	80 mm
난연	IEC 60332-1
연기밀도	IEC 61034-2
U.V resistance	Very good

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.

Storage temperature, range	-40...70 °C
Laying operation bending radius	120 mm
Installation type	Indoor/Outdoor
Installation temperature, range	0...40 °C
Water proof	Longitudinal & radial

성과 선언

TBU LSZH 24xSM G652D SP1724 BK pdf — 120.33 KB [다운로드](#) ↓

판매 및 배송 정보

Standard Marking

Aginode - FIBRE OPTIC CABLE - TBU LSZH Dca s1 d1 a1 SP1724 - XXxYY - FB - TN - metric

XX = Fibre Count YY = Fibre Type FB = Frameries, Belgium (manufacturing place) TN = Traceability Number