

B-LITE LT - 마이크로 루즈 튜브 케이블

NANOCABLE 8X24SM SM 200MM SP1895

Aginode Ref: B-Lite LT 200 8x24SM G657A1LL SP1895 COLT


This compact cable is used for Access, Distribution, City Network and FTTx applications. It is designed to be quickly installed by blowing in micro-ducts.

Characteristics & Applications

- High blowing distance due to the excellent friction properties of the outer sheath
- Right balance between flexibility and rigidity
- Easy installation with mid span access possibility
- Central strength member reinforcement
- All dielectric design
- Waterproof structure

Construction

- Jelly filled microloose tubes containing coloured fibres
- Central FRP strength member
- Very Low friction outer sheath

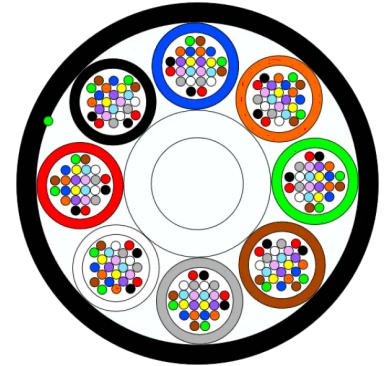

STANDARDS

EN 187000
IEC 60794

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.

Nanocable 8x24SM SM 200µm SP1895

Characteristics

구조적 특성

Fiber optic type	G657A1 - 200µm Low Loss
피복	HDPE
Metal free	Yes
Strength member	FRP
구조	멀티 번들 튜브

치수

Number of tubes	8
무게(근사치)	39 kg/km
Number of optical fibres	192
Nominal outer diameter (mm)	6.55 mm

기계적 특성

Maximum tensile load during service (Tl)	20.0 daN
Maximum admissible traction load (Tm)	75 daN
Crush resistance (IEC 60794-1-E3)	100 N/cm

Transmission characteristics

Optical performance	Max atténuation @ 1310nm/1550nm : 0.34/0.19 dB/km
---------------------	---

사용 특성

操作温度范围	-30...60 °C
Storage temperature, range	-30...60 °C
Installation type	Outdoor - Microduct blowable
Ambient installation temperature, range	0...40 °C
Bending factor when laying	20 (xD)

문서

White Paper Microblown Cable pdf — 1.94 MB [다운로드](#) ↓

판매 및 배송 정보

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.

Standard Marking

Aginode - FIBRE OPTIC CABLE - SPxxxx - XX*YY - FB - TN - metric

XX = Fibre Count

YY = Fibre Type

FB = Produced in Frameries, Belgium

TN = Traceability Number

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.