

LANmark-OF TB LSZH 2-24C - APAC Region

Tight buffered optical fibre cables

- Indoor cable designed for backbone/horizontal installation
- All fibre grades
- Low Smoke Zero Halogene (LSZH)

Description and Application

Aginode LANmark-OF TB Indoor fibre cable is designed for indoor applications. The fibre cable has 900µm tight buffered fibres with flame sheath around the transmission medium, and the 900µm sheath provides additional protection for the fibres. The cable is coated with aramid yarns as the strength member, and the outermost layer is coated with LSZH jacket. Bend Insensitive OM3/OM4 and SingleMode G.652.D and G.657.A1 are available.


The fibre cable is of a dry structure suitable for horizontal or vertical installation. The fibre cable meets the needs of indoor fire protection and can be installed in ducts.

- Can be installed both vertically or horizontally
- Applicable as standard multimode and singlemode fibre
- LSZH Jacket
- Tight buffered fibre for easy stripping

Construction

Legend accompanying the cross section drawing for 2-24core OF cable:

1. 900µm Tight buffered fibre
2. Aramid yarn
3. LSZH jacket materials

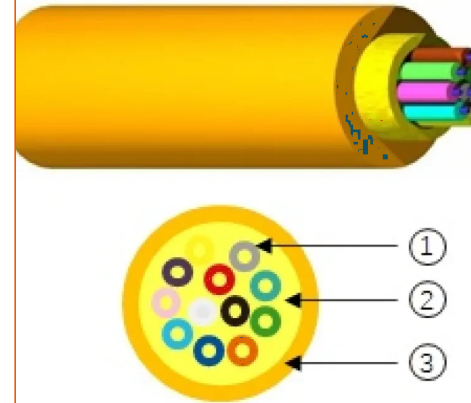

STANDARDS

- ANSI/TIA-568-C.3
- IEC 60332-1
- IEC 60332-3-24 Cat.C
- IEC 60793-2-10
- ISO/IEC 11801

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.

LANmark-OF TB LSZH 2-24C - APAC Region

CHARACTERISTICS

Construction characteristics

Colour	Yellow
Fiber optic type	SM (G.652D)

Dimensional characteristics

Outer Diameter	5.2 mm
Number of optical fibres	4

Mechanical characteristics

Mechanical resistance to impacts (IEC 60794-1-E4)	100 impacts of 1 N.m
Crush resistance (IEC 60794-1-E3)	1000 N/100mm
Maximum pulling force (IEC 60794-1-2-E1)	800 N

Usage characteristics

Operating temperature, range	-20...60 °C
Minimum dynamic operating bending radius	104.0 mm
Minimum static operating bending radius	52 mm
Storage temperature, range	-30...70 °C
Installation temperature, range	0...40 °C

Product list

	Aginode ref.	Country ref.	Name
☎	N174.021	-	LANmark-OF Tight Buffer LSZH SM G.652.D 4C YELLOW
☎	N177.020	-	LANmark-OF Tight Buffer LSZH OM4 2C AQUA
☎	N174.025	-	LANmark-OF Tight Buffer LSZH SM G.652.D 12C YELLOW
☎	N177.022	-	LANmark-OF Tight Buffer LSZH OM4 6C AQUA
☎	N174.020	-	LANmark-OF Tight Buffer LSZH SM G.652.D 2C YELLOW
☎	N174.022	-	LANmark-OF Tight Buffer LSZH SM G.652.D 6C YELLOW
☎	N175.021	-	LANmark-OF Tight Buffer LSZH OM3 4C ORANGE
☎	N175.025	-	LANmark-OF Tight Buffer LSZH OM3 12C ORANGE
☎	N175.031	-	LANmark-OF Tight Buffer LSZH OM3 24C ORANGE
☎	N177.023	-	LANmark-OF Tight Buffer LSZH OM4 8C AQUA
☎	N177.021	-	LANmark-OF Tight Buffer LSZH OM4 4C AQUA
☎	N175.022	-	LANmark-OF Tight Buffer LSZH OM3 6C ORANGE
☎	N175.023	-	LANmark-OF Tight Buffer LSZH OM3 8C ORANGE
☎	N174.023	-	LANmark-OF Tight Buffer LSZH SM G.652.D 8C YELLOW
☎	N174.031	-	LANmark-OF Tight Buffer LSZH SM G.652.D 24C YELLOW
☎	N177.025	-	LANmark-OF Tight Buffer LSZH OM4 12C AQUA
☎	N177.031	-	LANmark-OF Tight Buffer LSZH OM4 24C AQUA
☎	N175.020	-	LANmark-OF Tight Buffer LSZH OM3 2C ORANGE

☎ = Make to order, 📦 = In Stock

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.