
LANmark-OF TB LSZH 2-24C - APAC Region

Tight buffered optical fibre cables

- Indoor cable designed for backbone/horizontal installation
- All fibre grades
- Low Smoke Zero Halogene (LSZH)

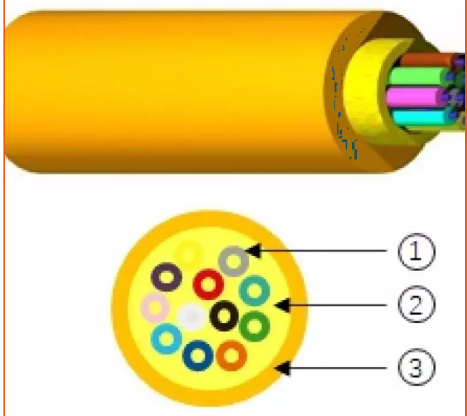

Description and Application

Aginode LANmark-OF TB Indoor fibre cable is designed for indoor applications. The fibre cable has 900µm tight buffered fibres with flame sheath around the transmission medium, and the 900µm sheath provides additional protection for the fibres. The cable is coated with aramid yarns as the strength member, and the outermost layer is coated with LSZH jacket. Bend Insensitive OM3/OM4 and SingleMode G.652.D and G.657.A1 are available.

The fibre cable is of a dry structure suitable for horizontal or vertical installation. The fibre cable meets the needs of indoor fire protection and can be installed in ducts.

• Can be installed both vertically or horizontally
• Applicable as standard multimode and singlemode fibre
• LSZH Jacket
• Tight buffered fibre for easy stripping

Construction

Legend accompanying the cross section drawing for 2-24core OF cable:

1. 900µm Tight buffered fibre
2. Aramid yarn
3. LSZH jacket materials

STANDARDS

ANSI/TIA-568-C.3
IEC 60332-1
IEC 60332-3-24 Cat.C
IEC 60793-2-10
ISO/IEC 11801

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.

LANmark-OF TB LSZH 2-24C - APAC Region

CHARACTERISTICS

Construction characteristics	
Fiber optic type	SM (G.652D)
Colour	Yellow
Dimensional characteristics	
Number of optical fibres	4
Outer Diameter	5.2 mm
Mechanical characteristics	
Mechanical resistance to impacts (IEC 60794-1-E4)	100 impacts of 1 N.m
Maximum pulling force (IEC 60794-1-2-E1)	800 N
Crush resistance (IEC 60794-1-E3)	1000 N/100mm
Usage characteristics	
Installation temperature, range	0...40 °C
Storage temperature, range	-30...70 °C
Operating temperature, range	-20...60 °C
Minimum dynamic operating bending radius	104.0 mm
Minimum static operating bending radius	52 mm

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.

Product list

	Aginode ref.	Country ref.	Name
	N174.021	-	LANmark-OF Tight Buffer LSZH SM G.652.D 4C YELLOW
	N177.020	-	LANmark-OF Tight Buffer LSZH OM4 2C AQUA
	N174.025	-	LANmark-OF Tight Buffer LSZH SM G.652.D 12C YELLOW
	N177.022	-	LANmark-OF Tight Buffer LSZH OM4 6C AQUA
	N174.020	-	LANmark-OF Tight Buffer LSZH SM G.652.D 2C YELLOW
	N174.022	-	LANmark-OF Tight Buffer LSZH SM G.652.D 6C YELLOW
	N175.021	-	LANmark-OF Tight Buffer LSZH OM3 4C ORANGE
	N175.025	-	LANmark-OF Tight Buffer LSZH OM3 12C ORANGE
	N175.031	-	LANmark-OF Tight Buffer LSZH OM3 24C ORANGE
	N177.023	-	LANmark-OF Tight Buffer LSZH OM4 8C AQUA
	N177.021	-	LANmark-OF Tight Buffer LSZH OM4 4C AQUA
	N175.022	-	LANmark-OF Tight Buffer LSZH OM3 6C ORANGE
	N175.023	-	LANmark-OF Tight Buffer LSZH OM3 8C ORANGE
	N174.023	-	LANmark-OF Tight Buffer LSZH SM G.652.D 8C YELLOW
	N174.031	-	LANmark-OF Tight Buffer LSZH SM G.652.D 24C YELLOW
	N177.025	-	LANmark-OF Tight Buffer LSZH OM4 12C AQUA
	N177.031	-	LANmark-OF Tight Buffer LSZH OM4 24C AQUA
	N175.020	-	LANmark-OF Tight Buffer LSZH OM3 2C ORANGE

= Make to order, = In Stock

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.