

LANmark-6A Cable (International)

LANMARK-6A F/UTP AWG23 CAT 550MHZ 6A LSZH ORANGE 1000M REEL

Aginode Ref: N100.671G

- Ideal cable for 10GBase-T application
- Full compliance to latest standards for Category 6A and Class EA
- Guaranteed performance up to 500MHz, test extended to 550Mhz
- Global screen offering Alien Crosstalk immunity

Application

LANmark-6A cables are the ideal solution for a 10G Ethernet network. The range has been designed specifically to support the higher frequencies required for 10 Gigabit Ethernet, while maintaining full backwards compatibility with today's needs. All LANmark-6A cables are shielded, in order to ensure immunity to Alien Crosstalk and other external interferences.


- 10Base-T Ethernet
- 100Base-TX Fast Ethernet
- 1000Base-TX Gigabit Ethernet
- 10GBase-T 10 Gigabit Ethernet IEEE 802.3
- 155 Mbit ATM
- 1.2 Gbit ATM
- future Cat 6A and Class EA applications

Performance

Tested to 550MHz, Aginode LANmark-6A cables exceed the requirements of the International, European and American cable standards, including ISO/IEC 11801, IEC 61156-5, EN 50173, EN 50288 and TIA/EIA 568-C.2.

When used in combination with Aginode LANmark-6A Evo connectors and LANmark-6A Ultim patch cords, the system supports the 10GBase-T applications as defined in IEEE 802.3an and meets or exceeds the link and channel requirements for Category 6A and Class EA as defined in TIA/EIA 568-C.2 and ISO/IEC 11801.

Installation

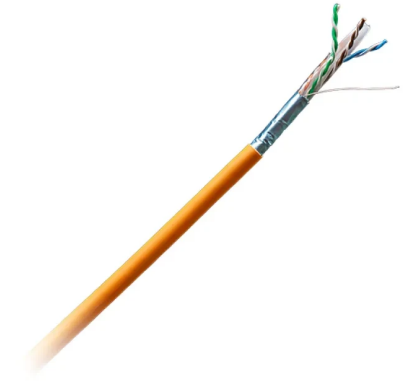

STANDARDS

ANSI/TIA-568-C.2
EN 50173-1
EN 50288-4-1
IEC 61156-5
ISO/IEC 11801

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.

The LANmark-6A cables have the advantage of offering flexibility for installation and termination.

To support the correct set-up of hand held analysers for installation testing, the actual cable NVP value is given in the cable’s print legend.

Guarantees

Traceability codes on both cable and packaging ensure quality validation of the installed cable.

Installations with LANmark-6A cable and connectivity are qualified for a 25 year full system warranty, which includes Parts, Channel Performance, Application Support and Labour, as described in the Aginode Certified System Warranty.

Electrical Performance LANmark-6A Cable (International)

Freq in MHz	Attn in dB		NEXT in dB		PSNEXT in dB		ACR-F in dB		PS ACR-F in dB		PS ANEXT in dB		PS AACR-F in dB		RL in dB	
	Max.	Typ.	Max.	Typ.	Max.	Typ.	Max.	Typ.	Max.	Typ.	Max.	Typ.	Max.	Typ.	Max.	Typ.
4	3.8	3.8	65.3	70.3	63.3	68.3	55.8	75.8	52.8	72.8	67	90	66.2	75	23	29
10	5.9	5.9	59.3	64.3	57.3	62.3	47.8	67.8	44.8	64.8	67	87	58.2	67	25	31
16	7.5	7.5	56.2	61.2	54.2	59.2	43.7	63.7	40.7	60.7	67	85	54.1	63	25	31
20	8.4	8.4	54.8	59.8	52.8	57.8	41.8	61.8	38.8	58.8	67	84	52.2	61	25	31
31.25	10.5	10.5	51.9	56.9	49.9	54.9	37.9	57.9	34.9	54.9	67	82	48.3	58	23.6	29.6
62.5	15	15	47.4	52.4	45.4	50.4	31.9	51.9	28.9	48.9	65.6	79	42.3	52	21.5	27.5
100	19.1	19.1	44.3	49.3	42.3	47.3	27.8	47.8	24.8	44.8	62.5	77	38.2	47	20.1	26.1
155	24.1	24.1	41.4	46.4	39.4	44.4	24	44	21	41	59.6	74	34.4	43	18.8	24.8
250	31.1	31.1	38.3	43.3	36.3	41.3	16.8	36.8	13.8	33.8	56.5	71	30.2	39	17.3	23.3
500	45.3	45.3	33.8	36.8	31.8	34.8	10.8	30.8	7.8	27.8	52	66	24.2	33	15.2	21.2
550		49.7		32.4		30.4			24.5		21.5		53		25	15.4

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.



LANmark-6A F/UTP AWG23 Cat 550Mhz 6A LSZH Orange

1000m reel

Characteristics

Construction characteristics

Colour	Orange
Outer sheath	LSZH
Type of cable	F/UTP

Dimensional characteristics

Conductor cross-section (AWG/KCMIL)	23
Diameter over insulation	1.12 mm
Nominal outer diameter (mm)	7.2 mm

Electrical characteristics

Mutual capacitance	45 nF/km
Characteristic impedance	100 Ohm
Max. transfer impedance at 30 MHz (Ohm/km)	120 Ohm/km
Max. DC resistance of the conductor at 20°C	85 Ohm/km

Mechanical characteristics

Maximum operating pulling force	110 N
---------------------------------	-------

Transmission characteristics

Skew	45 ns/100m
Attenuation Crosstalk Ratio, 250MHz	12.2 dB/100m
Nominal Velocity of Propagation (NVP)	67 %
Coupling attenuation at 30 MHz	>70 dB
Propagation delay, max. 100 MHz	536 ns/100m

Usage characteristics

Range	LANmark-6A
Gases corrosivity	IEC 60754-1; IEC 60754-2
Operating temperature, range	-20...60 °C
Category	Cat. 6A

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.

Flame retardant	IEC 60332-1
Smoke density	IEC 61034
Packaging	Reel
Ambient installation temperature, range	-10...60 °C
Minimum Bend Radius - During Installation (under Tension)	60 mm
Minimum Bend Radius - Installed	30 mm

Documentation

[Freetable LM6A F1UTP V3_2.xls xls](#) — 21 KB [Download](#) ↓