

Duct - Loose Tube cables

LOOSE TUBE ARMORED CABLE 6X12SM SP1466

Aginode Ref: A-DQ(ZN)B2Y

This cable is used for Access, Distribution, City Network and FTTx applications. It is designed to be installed by pulling or blowing in ducts.

Characteristics & Applications


- High blowing distance due to the excellent friction properties of the outer sheath
- Central strength member reinforcement
- High pulling strength
- All dielectric design
- Waterproof dry core structure

Fibre Type

The cable is available with different fibre types.

Construction

- Jelly filled tubes containing coloured fibres
- Central FRP strength member
- Glass yarns armoring
- Very Low friction outer sheath

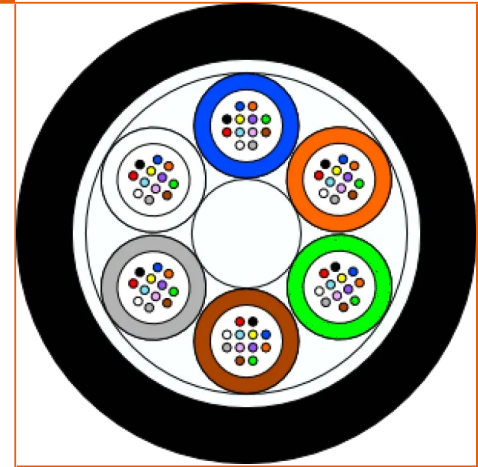

STANDARDS

EN 187000
IEC 60794

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.

Loose Tube Armored Cable 6x12SM SP1466

Characteristics

Construction characteristics

Armour type	Glass yarns
Outer sheath	HDPE
Fiber optic type	SM
Construction type	Loose Tube
Metal free	Yes
Strength member	FRP

Dimensional characteristics

Number of tubes	6
Number of optical fibres	72
Nominal outer diameter (mm)	10.0 mm
Approximate weight	85 kg/km

Mechanical characteristics

Crush resistance (IEC 60794-1-E3)	300 N/cm
Maximum admissible traction load (Tm)	514 daN

Usage characteristics

Installation type	Outdoor - Duct
Operating temperature, range	-30...70 °C
Bending factor when laying	20 (xD)
Storage temperature, range	-40...70 °C
Rodent protection	Glass yarns
Ambient installation temperature, range	0...40 °C

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.