

# LANmark-OF Loose Tube Universal 6-12 and 24FO - Dca

LANMARK-OF LOOSE TUBE UNIVERSAL 06XSINGLEMODE 9/125 OS2 LSZH DCA YELLOW

**Aginode Ref:** N164.LTUN06-YD

- Loose Tube Universal optical fibre cable with high level transmission : OS2
- Good fire behavior : reaction to fire Dca according to EN50575:2014+A1:2016
- Indoor/Outdoor cable
- Designed for splicing with pigtails


The new 6FO OS2 CPR Dca-certified Loose Tube technology from Aginode is specifically engineered for both indoor and outdoor installations where high performance, fire safety, and environmental durability are essential. Featuring a loose tube construction, it provides reliable protection for fibers against mechanical stress and environmental conditions.

- **CPR (Dca-s2, d1, a1):** Low fire propagation, reduced smoke emission, minimal toxic gas release.
- **Loose Tube Construction:** Excellent fiber protection against mechanical stress and temperature variations.
- **Indoor & Outdoor Applications:** Ideal for structured cabling in residential, commercial, and public buildings, as well as outdoor environments.
- **High Performance OS2 :** Reliable, high-speed data transmission over medium long distances.
- **Flexible and Robust:** Easy to install in ducts, conduits, and technical spaces.

The central tube contains till 6 fibers well identified to make installation easy and simple.

## Applications :

- Building backbone networks
- Data centers
- Outdoor installations

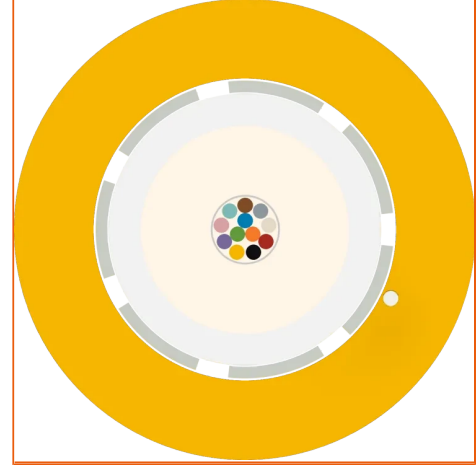

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.

# LANmark-OF Loose Tube Universal 06xSinglemode 9/125 OS2 LSZH Dca Yellow

## Characteristics

### Construction characteristics

Construction type	Loose Tube
Fiber optic type	SM (G657.A1)
Halogen free	IEC 60754-1
Material used for longitudinal water tightness	Swellable Glass yarns
Tube Filling Compound Material	Thixotropic Gel

### Dimensional characteristics

Approximate net weight	56 kg/km
Nominal outer diameter (mm)	6.2 mm
Number of optical fibres	6
Number of tubes	1
Tube diameter	2.8 mm

### Mechanical characteristics

Crush resistance (IEC 60794-1-E3)	2000 N/100mm
Maximum installation tension	2000 N
Maximum permanent tensile load	0.7 kN
Maximum pulling force (IEC 60794-1-2-E1)	2000 N
Mechanical resistance to impacts	10 impacts of 3 N.m

### Usage characteristics

Fire retardant	IEC 60332-3
Flame retardant	IEC 60332-1-2
Installation temperature, range	-30...60 °C
Minimum dynamic operating bending radius	152 mm
Minimum static operating bending radius	114 mm
Operating temperature, range	-40...70 °C
Smoke density	IEC 61034-2

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.

Storage temperature, range

-40...70 °C

U.V resistance

Very good

## DoP: Declaration of Performance

DOP\_LANmark-OF Loose Tube Universal 06xSinglemode 9/125 OS2 LSZH Dca Yellow.pdf pdf — 59.08 KB [Download](#) ↓