

# Cat.6A 550 U/FTP LSZH Dca

- Complies to latest Cat 6A standard version
- Supports Class EA applications
- Cable tested up to 550 MHz
- Flame retardant according to EN50575:2014+A1:2016 and IEC 60332-1
- Individual foiled pairs for EMC performance
- Compatible POE, POE+ and UPOE
- RoHS EC Directive compliant
- Compliant with European Reach regulation

## Application

U/FTP Category 6A cables are the high end offering from Aginode. Manufactured in accordance with ISO IEC 61156-5 requirements, the U/FTP cable is the best choice to support all Class EA applications like Ethernet, Fast Ethernet, Gigabit Ethernet, 10 Gigabit Ethernet, ... The Cat 6A U/FTP cables are suitable for voice, data, CATV and sharing application installations up to 500 MHz. Aginode Cat.6A cables, combined with a similar class of performance connectivity, are suitable for voice and data installations according to ISO/IEC 11801, EN 50173 and TIA/EIA 568 standards.


## Construction

1. Conductor: solid bare copper
2. Insulation : Polyethylen (EN 50290-2-23) - Two insulated conductors twisted to a pair
3. Screen: ALU/PET on each pair. Alu outside - 4/2 laid up together
4. Tinned copper drain wire
5. Outer Jacket : LSZH - Dca S2 d1 a1 (EN50575)

## Environment

Designed to reduce the environment impact, Aginode cables are compliant with RoHS 2011/65 Directive and European Reach 1907/2006/EC regulation. The outer sheat of the cabel is made of halogen free material (IEC 60754-1 / EN 50267-2-1), with limited fumes emission (IEC 61034-1/2 / EN 50268-1/2) and no acid gaz emission in case of fire (IEC 60754-2 / EN 50267-2-2).

Aginode measure the environmental impact of each of the

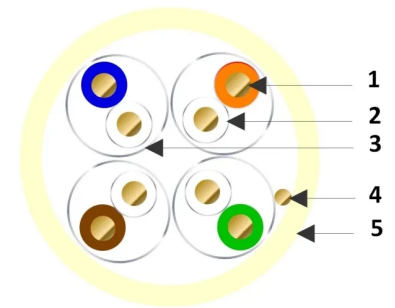

## STANDARDS

EN 50173  
EN 50288  
IEC 60332-1  
IEC 61156-5  
ISO/IEC 11801

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.

cable. Upon request the PEP Ecopassport or the Eco Material Declaration could be available.

## Cat 6A 550 U-FTP TRANSMISSION CHARACTERISTICS

### CAT.6A 550 U/FTP TRANSMISSION CHARACTERISTICS

Values at 20°C

Frequency (MHz)	S/T	4	16	20	31.25	62.5	100	155	200	240	250	350	500	550
Attenuation max. (dB/100m)	Standard	3.8	7.5	8.4	10.5	15.0	19.1	24.1	27.6	31.1	34.3	37.2	45.3	-
	Typical	3.6	7.2	8.0	10.0	14.2	18.1	22.7	25.8	29.0	31.9	34.6	41.8	43.9
NEXT min. (dB)	Standard	75.0	75.0	75.0	72.9	68.4	65.3	62.4	60.8	59.6	59.3	57.1	54.8	-
	Typical	100.0	100.0	100.0	100.0	100.0	97.4	94.5	92.9	91.7	91.4	89.2	86.9	86.3
PSNEXT min. (dB)	Standard	75.0	74.2	72.8	69.9	65.4	62.3	59.4	57.8	56.6	56.3	54.1	51.8	-
	Typical	100.0	100.0	100.0	100.0	97.5	94.4	91.5	89.9	88.7	88.4	86.2	83.9	83.3
ACRF min. (dB)	Standard	66.0	53.9	52.0	48.1	42.1	38.0	34.2	32.0	30.4	30.0	27.1	24.0	-
	Typical	91.2	89.4	89.0	88.0	85.9	84.0	81.7	80.1	78.5	75.7	75.7	72.1	71.0
PSACRF min. (dB)	Standard	63.0	50.9	49.0	45.1	39.1	35.0	31.2	29.0	27.4	27.0	24.1	21.0	-
	Typical	88.2	86.4	86.0	85.0	82.9	81.0	78.7	77.1	75.8	75.5	72.7	69.1	68.0
Return Loss min. (dB)	Standard	23.0	25.0	25.0	23.6	21.5	20.1	18.8	18.0	17.4	17.3	17.3	17.3	-
	Typical	28.0	30.0	30.0	28.6	26.5	25.1	23.8	23.0	22.4	22.3	22.3	22.3	22.3

According to standard Cat.6A IEC61156-5, except for NEXT & PSNEXT: from 4 to 500Mhz, performances + 20dB and for ACRF & PSACRF, performances + 10dB

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.

# Cat.6A 550 U/FTP LSZH Dca

## CHARACTERISTICS

*All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.*

*All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.*